

AC Current Probes

CT1 • CT2 • CT6 Data Sheet



CT6. Current Probe

Features & Benefits

- High Bandwidth
- Ultra-low Inductance
- Very Small Form Factor
- Characterize Current Waveforms up to <math><200\text{ ps}</math> Rise Times
- Very Low Loading of Circuit Under Test
- Fits Into Dense, Closely-spaced Circuit Designs

Applications

- Data Storage Read Channel Design
- Silicon Characterization
- High-frequency Analog Design
- ESD Testing
- Signal Injection
- Differential Current Measurements
- Single-shot Low Rep-rate Pulse Measurements
- Propagation Delay Measurement



CT1/CT2. Current Probes with P6041 BNC Probe Cable.

CT6 Current Probe

The CT6 is the newest addition to the Tektronix portfolio of high-frequency current probes. It is designed to meet the needs of high-speed circuit design and test applications which require ultra-high bandwidth, low inductance, and extremely small form factor. The CT6 provides up to 2 GHz bandwidth when used with high-bandwidth oscilloscopes such as the Tektronix TDS694C, TDS794D, and TDS7000 Series oscilloscopes or with other compatible 50 Ω input measuring instruments. Low inductance (<3 nH) assures that the loading effect of the CT6 on the circuit-under-test will be negligible, which is especially important for today's low-amplitude, high-speed circuit designs such as disk drive read/write preamplifiers. The probe is a closed-circuit design which will accept uninsulated wire sized up to 20 gauge. This product is exempt from CE mark by virtue of its 30 V voltage limit.

CT1/CT2 Current Probes

The CT1 and CT2 Current Probes are designed for permanent or semi-permanent in-circuit installation. Each probe consists of a current transformer and an interconnecting cable. The current transformers have a small hole through which a current carrying conductor is passed during circuit assembly.

The P6041 Probe Cable provides the connection between the CT1 and CT2 Current Transformers and a BNC oscilloscope input. A 50 Ω termination is required to terminate the cable when connected to a high-impedance (1 M Ω) oscilloscope input. One probe cable can be used to monitor several current transformers that have been wired into a circuit.

Miniature Construction

The CT1 and CT2 detachable cable design enables one or more probes to be located on circuit boards or in other limited space areas.

The CT6 offers the smallest form factor available, for measurement on ever-shrinking circuit boards and components. It is designed for temporary installation and does not incorporate removable cables, as the CT1 and CT2 do.

Extendible Probe Length

Specified rise time and bandwidth are obtained when using the probe cables provided: The P6041 cable used with the CT1 and CT2 is 42 inches nominal. If additional length is required, the cables can be extended by using high-quality 50 Ω cable and suitable interface connectors. (Also see Special Probe Cables, Optional Accessories.) Long cables may degrade high-frequency response.

High Sensitivity

The CT1 and CT6 provide an output of 5 mV for each milliamp of input current when terminated in 50 Ω . The CT2 provides 1 mV per milliamp when terminated in 50 Ω .

Typical Systems

The CT1, CT2, and CT6 high-frequency current transformers are dynamic (i.e., non-DC) current measuring devices. They are typically used in conjunction with compatible high-bandwidth oscilloscopes and other instruments to observe and/or record high-frequency current waveforms. The CT1, CT2, and CT6 normally operate directly into 50 Ω scopes and other measuring device inputs.

The CT1 or CT2 can be used with 1 M Ω input systems; use the P6041 probe cable and terminate the output with a 50 Ω feed-through termination (see Optional Accessories).

In all cases, the CT1, CT2, and CT6 must work into 50 Ω s to obtain specified performance and sensitivity.

Typical Measurement Applications

Differential Current Measurements

Most true-differential voltage amplifiers have a maximum bandwidth of about 100 MHz. The CT1 or CT6 can make differential current measurements to 1 GHz and 2 GHz, respectively, by passing two wires carrying opposing currents through the same core. The displayed result is the difference current. The CT2 can perform the same function to 200 MHz.

In all cases, Derating with Frequency and Amp-second Product (Current-time Product) guidelines should not be exceeded. (See Characteristics.)

Single-shot and Low Rep-rate Pulse Measurements


These common measurements are easy to make with the CT1, CT2, or CT6 provided that your signal fits within the Max Pulse Current and Amp-second Product (Current-time Product) guidelines for the specific current probe characteristics.

For example, the CT2 is rated at 36 A peak, with an Amp-second Product of 50×10^{-6} seconds (50 Amp-microseconds), therefore the CT2 can safely handle a 36 A peak pulse with a maximum width of 1.39 microseconds or lower amplitude pulses for longer pulse widths. The CT1, CT2, and CT6 all have low-frequency roll-off characteristics. Low-frequency "droop" will exhibit itself when the pulse width approaches the L/R time constant of the specific transformer.


Propagation Delay Measurements

Two CT1 or CT2 Current Transformers with matching probe cables can be used to measure propagation delay (transit time) between the input and output currents of high-frequency devices. The probe outputs are connected to the inputs of dual-channel real-time or sampling scopes.


Verification of any Probe/Cable/Scope System mismatch can be obtained by passing the same signal current through both probes and observing total system delay difference, if any.

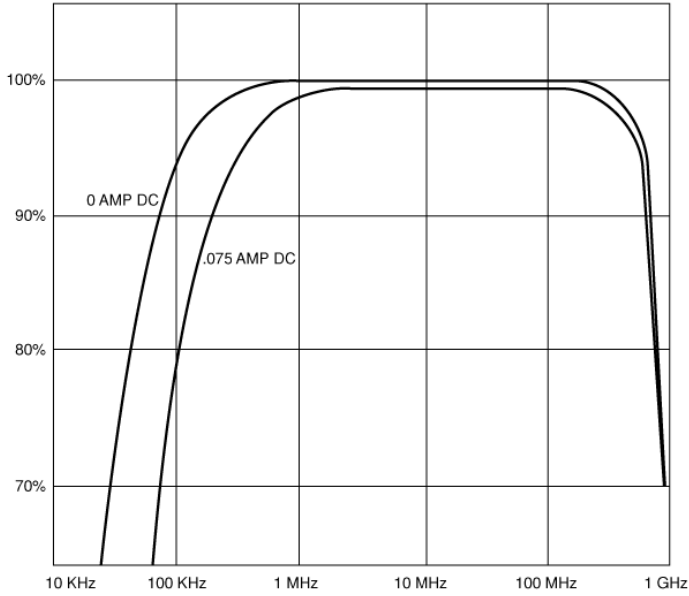

CT1 Typical Frequency Response.

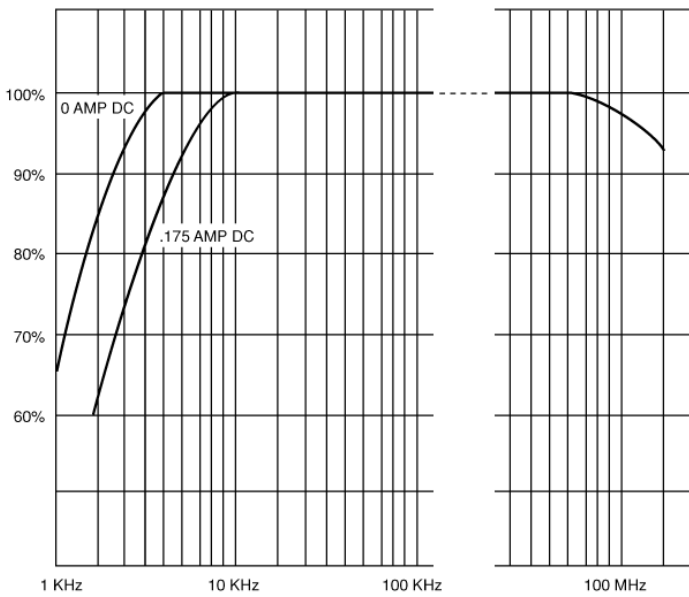

CT2 Typical Frequency Response.

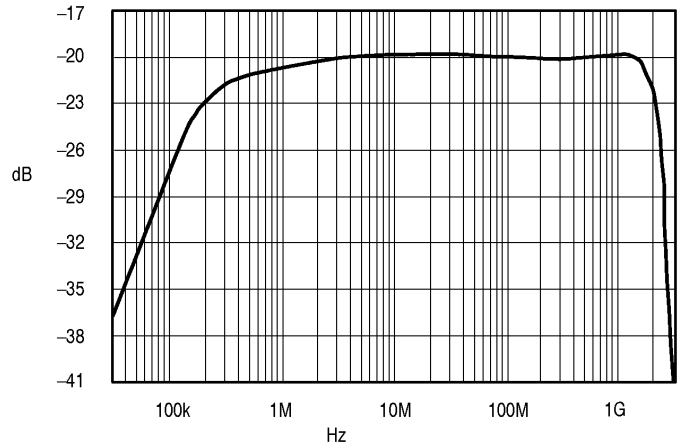

CT6 Typical Frequency Response.

Characteristics

CT1, CT2, and CT6 Characteristics

Characteristic	CT1	CT2	CT6
Bandwidth (typical)	25 kHz to 1 GHz	1.2 kHz to 200 MHz	250 kHz to 2 GHz
Rise Time	350 ps	500 ps	200 ps
Sensitivity (into 50 Ω)	5 mV/mA	1 mV/mA	5 mV/mA
Accuracy	±3%	±3%	±3%
Magnetizing Inductance	6 μH	7 μH	1 μH
Leakage Inductance	2.4 nH	1 nH	1.5 nH
Insertion Impedance:			
at 10 MHz	<1 Ω	0.1 Ω	1.1 Ω
at 100 MHz	2 Ω	0.5 Ω	1.3 Ω
at 1 GHz			11.9 Ω
Max. Bare Wire Size	#14 wire 1.78 mm (0.070 in.)	#16 wire 1.32 mm (0.052 in.)	#20 wire 0.8 mm (0.032 in.)
Max. Bare Wire Voltage:			
RMS	175 V _{RMS} CAT I	175 V _{RMS} CAT I	30 V _{RMS} CAT I
Peak	1000 V*1	1000 V*1	30 V
DC	175 V	175 V	30 V
Max. Peak Pulse Current	12 A	36 A	6 A
Max. Continuous Current (RMS)	450 mA	2.5 A	120 mA
Amp-second Product	1 × 10 ⁻⁶ A*Sec	50 × 10 ⁻⁶ A*Sec	0.25 × 10 ⁻⁶ A*Sec
L/R Time Constant (droop)	>6.35 μs	>160 μs	0.4 μs
Propagation Delay	3.25 ns	6.1 ns	5.2 ns
Safety	UL3111-2-032, CSA1010.2-032, EN61010-2-032, IEC61010-2-032	UL3111-2-032, CSA1010.2-032, EN61010-2-032, IEC61010-2-032	NA

*1 (<3.25% Duty Factor).

Ordering Information

CT1

High-frequency Current Probe.

Includes: Manual and P6041 Interconnect Cable.

CT2

High-frequency Current Probe.

Includes: Manual and P6041 Interconnect Cable.

CT6

High-frequency Current Probe.

CT1 or CT2 Recommended Accessories

Feed-through 50 Ω Termination – Order 011-0049-02.

Service

Opt. C3 – Calibration Service 3 Years

Opt. C5 – Calibration Service 5 Years

Opt. D1 – Calibration Data Report (CT6 only)

Opt. D3 – Calibration Data Report 3 Years (with Opt. C3)

Opt. D5 – Calibration Data Report 5 Years (with Opt. C5)

Opt. R3 – Repair Service 3 Years

Opt. R5 – Repair Service 5 Years

CT6 Standard Accessories

SMA to BNC Adapter – Order 015-0572-xx.

User Manual – Order 071-0453-xx.

Color Cable Marker Bands –

Probe Holder – Order 015-0682-xx.

Certificate of Traceable Calibration –

Warranty – One Year.



Product(s) are manufactured in ISO registered facilities.



Contact Tektronix:

ASEAN / Australasia (65) 6356 3900
Austria +41 52 675 3777
Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Belgium 07 81 60166
Brazil +55 (11) 40669400
Canada 1 (800) 661-5625
Central East Europe, Ukraine, and the Baltics +41 52 675 3777
Central Europe & Greece +41 52 675 3777
Denmark +45 80 88 1401
Finland +41 52 675 3777
France +33 (0) 1 69 86 81 81
Germany +49 (221) 94 77 400
Hong Kong (852) 2585-6688
India (91) 80-42922600
Italy +39 (02) 25086 1
Japan 81 (3) 6714-3010
Luxembourg +44 (0) 1344 392400
Mexico, Central/South America & Caribbean 52 (55) 54247900
Middle East, Asia, and North Africa +41 52 675 3777
The Netherlands 090 02 021797
Norway 800 16098
People's Republic of China 86 (10) 6235 1230
Poland +41 52 675 3777
Portugal 80 08 12370
Republic of Korea 82 (2) 6917-5000
Russia & CIS +7 (495) 7484900
South Africa +27 11 206 8360
Spain (+34) 901 988 054
Sweden 020 08 80371
Switzerland +41 52 675 3777
Taiwan 886 (2) 2722-9622
United Kingdom & Ireland +44 (0) 1344 392400
USA 1 (800) 426-2200

For other areas contact Tektronix, Inc at: 1 (503) 627-7111

Updated 30 October 2008

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tektronix.com



Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

03 Jun 2009

60W-12572-1

www.tektronix.com



Distributed by:
www.SignalTestInc.com
1529 Santiago Ridge Way
San Diego, CA 92154 USA.
Sales@SignalTestInc.com

