

**RIGOL**  
Beyond Measure

Distributed By:  
Signal Test, Inc  
1529 Santiago Ridge Way  
San Diego, CA 92154  
Tel. 1-619-575-1577 USA  
www.SignalTestInc.com  
Sales@SignalTestInc.com

**SIGNAL TEST**  
New & Used Test Equipment





# M300 Series Data Acquisition/ Switch System

- Up to 320 switch channels per mainframe, save on cost of ownership
- Can be run without PC
- USB logging
- Interval scanning with storage of up to 100,000 time-stamped readings
- 11 kinds of cards supported
- 6<sup>1/2</sup> DMM can be enabled/disabled in any of slots
- Standard SCPI commands
- Math statistics: AVG, MAX, MIN, SDEV
- 4.3" TFT LCD
- Powerful PC software
- Full Interfaces supported: USB Device, USB Host, GPIB, LAN(LXI-Core Device 2011), RS232

M300 Series Data Acquisition/Switch System with modular structure, which combines precision measurement capability with flexible signal connections, can provide versatile solutions for the applications with multiple points or signals to be tested in product performance test during R&D phase as well as automatic test during production process.




# M300 Series Data Acquisition/Switch System

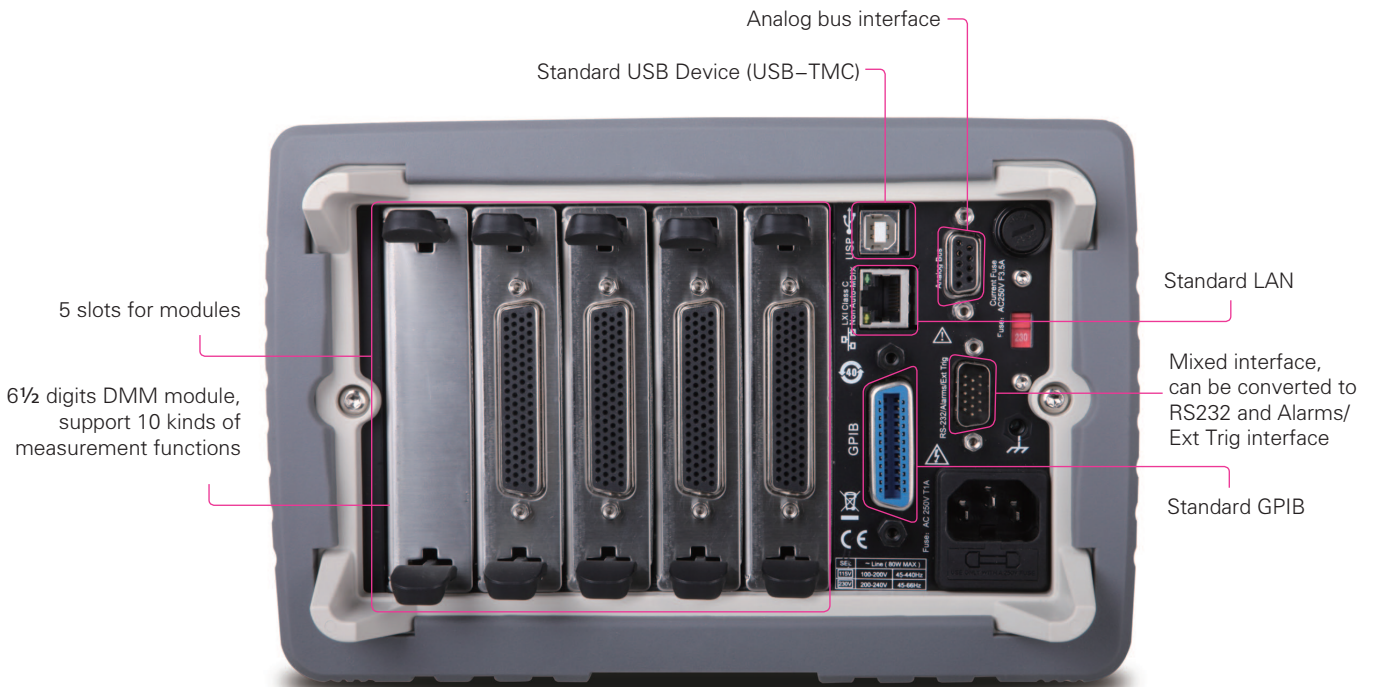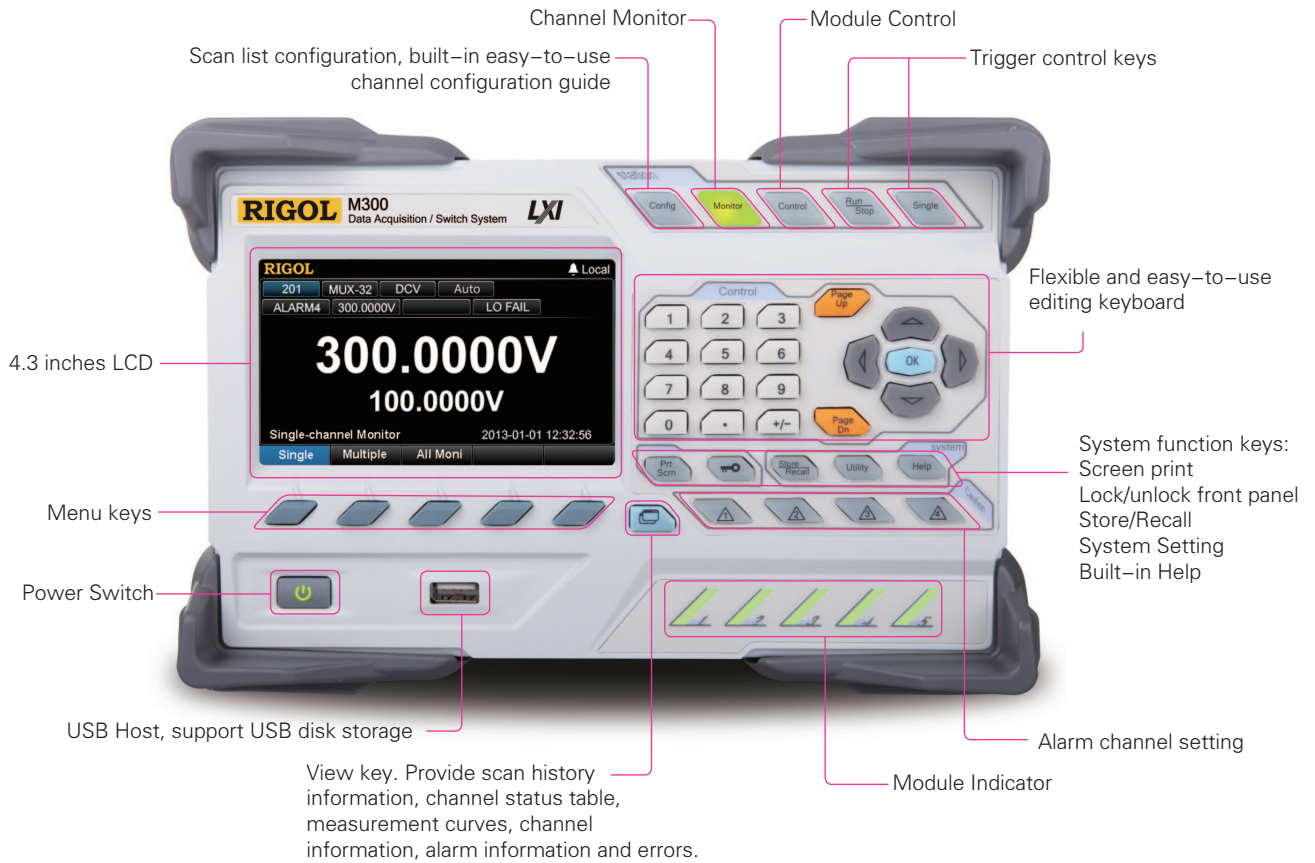


Product Dimensions: Width X Height X Depth=239.0mm×159.0 mm×373.4 mm Weight: 5.7 kg(Without Package)

## ► Feature and Benefits


### • Channel Configuration Guide

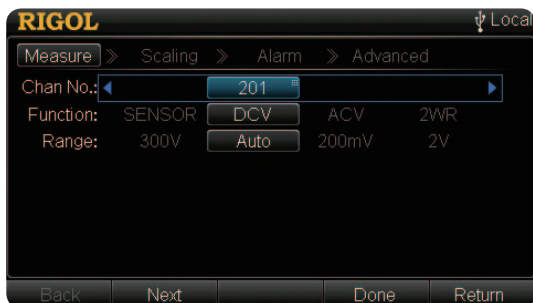


Measurement Configuration

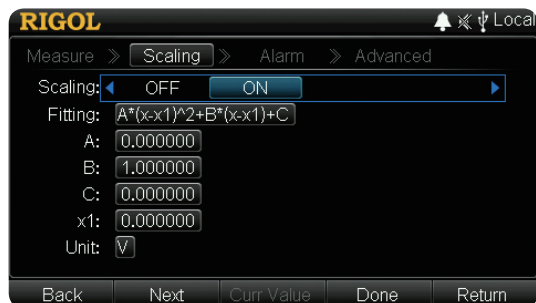

Scaling Configuration

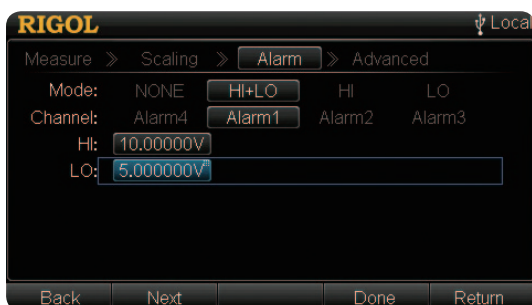

Alarm Configuration

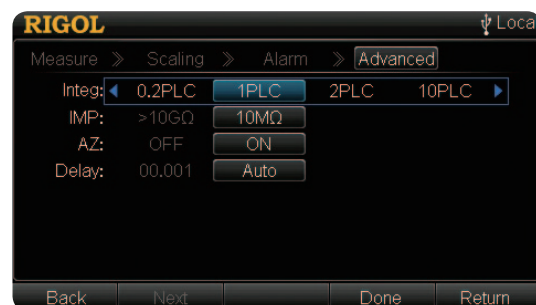


Advanced Configuration

### • Channel Monitor



Single Channel Monitor

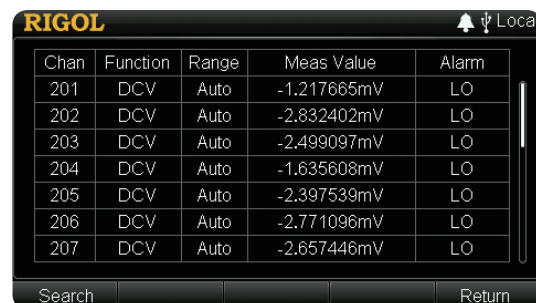


Multiple/All Channel Monitor

### • Multi-View Switch




Display real-time scan information and all the measurement data of the channel selected

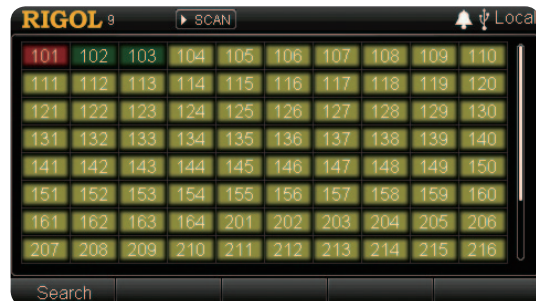

Display real-time channel status



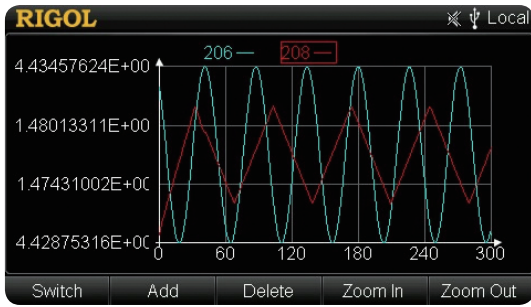

Draw scan data curves

312	2938559Cyc	313	2938539Cyc	314	2938537Cyc
315	2938497Cyc	316	2938496Cyc	317	2938788Cyc
318	2938742Cyc	319	2938746Cyc	320	2938727Cyc
321	2938491Cyc	322	2938471Cyc	323	2938684Cyc
324	2938673Cyc	325	2938465Cyc	326	2938470Cyc
327	2938462Cyc	328	2938459Cyc	329	2938457Cyc
330	2938455Cyc	331	2938452Cyc	332	2938453Cyc
397	1422989Cyc	398	0Cyc	399	1418841Cyc

Record each relay cycle on each module


Alarm Data	Time	Channel	Mode	Alarm
994.0293mV	07-23 14:05:05.000	101	HI	1

Alarm Information


No.	Error Info
1	-113,"Undefined header; keyword cannot be found"
2	-113,"Undefined header; keyword cannot be found"
3	-113,"Undefined header; keyword cannot be found"
4	-102,"Syntax error"

Error Information

• Multiple Configuration Copy Functions

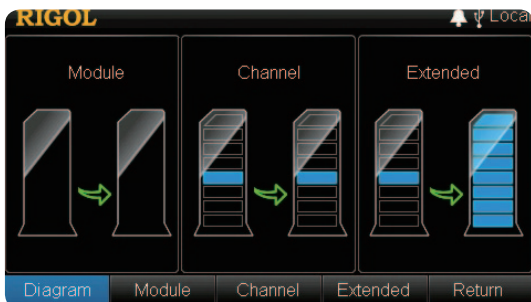

Multiple configuration copy function, can configure multiple channels conveniently and quickly

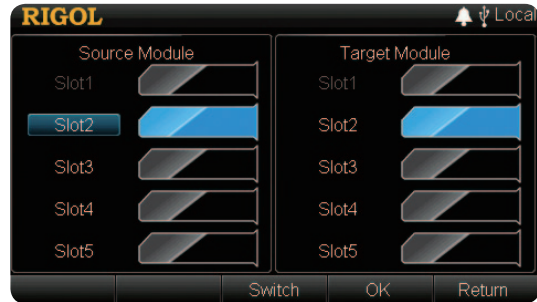

Module Copy

SourceChan	101	102	103	104	105	106	107	108	109	110	111
102	103	104	105	106	107	108	109	110	111		
112	113	114	115	116	117	118	119	120	121		
122	123	124	125	126	127	128	129	130	131		

Channel Copy




Extended Copy


• To Control Each Module Separately




To control each module separately

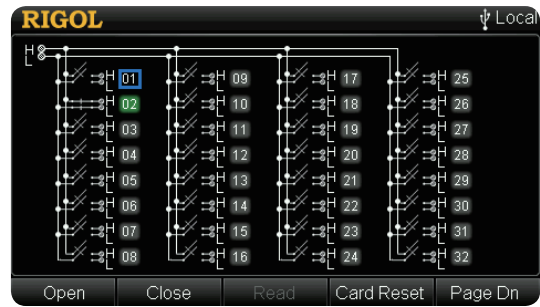


MC3132 Control Interface

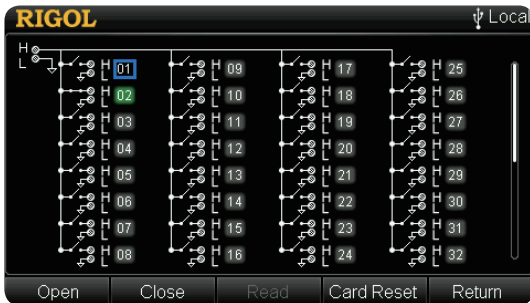


MC3164 Control Interface

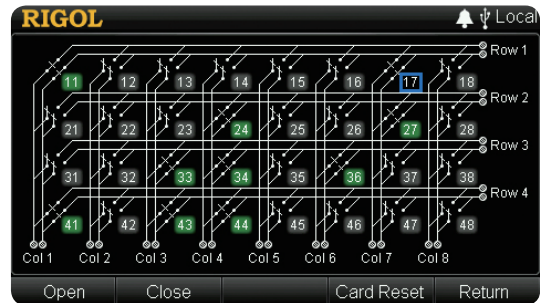

MC3648 Control Interface

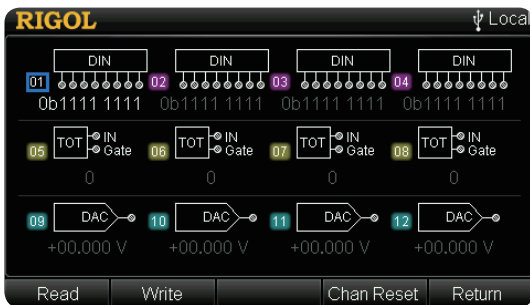


MC3534 Control Interface

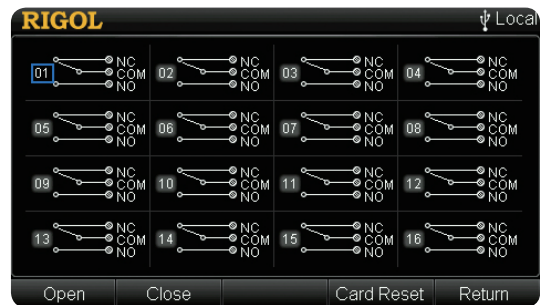


MC3416 Control Interface



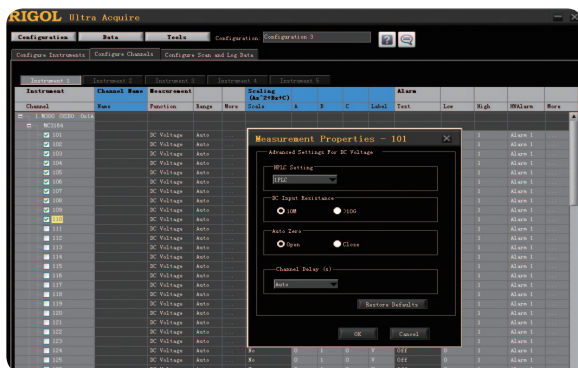



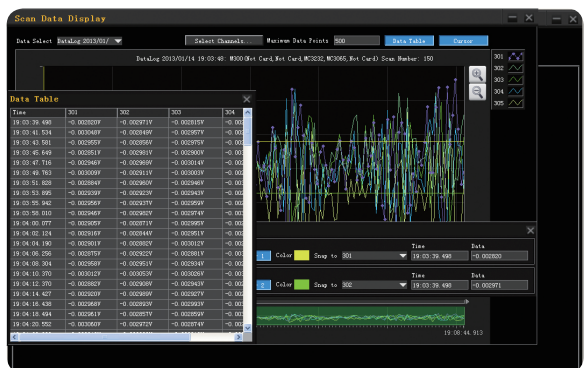






• Channel Configuration of Ultra Acquire










• Data Analysis of Ultra Acquire



## Modules/Terminal Box Supported by M300

Module	Terminal Box	Description
 <p>DMM-MC3065</p>		<ul style="list-style-type: none"> <li>• DMM module</li> <li>• Used to measure the signal</li> <li>• 6½ digits</li> <li>• Support the following functions: DCV, ACV, DCI, ACI, 2WR, 4WR, FREQ, PERIOD, TEMP and any sensor</li> <li>• After connecting the DMM module, make sure that the signal under test connected to the analog bus is no greater than 300 Vdc or 300 Vrms</li> </ul>
 <p>MUX20-MC3120</p>	 <p>TB20</p>	<ul style="list-style-type: none"> <li>• 20-channel multiplexer</li> <li>• All 20 channels switch both HI and LO inputs</li> <li>• Support 4-wire measurement</li> <li>• The signal to be tested is connected through the TB20 terminal box</li> <li>• Can be connected with MC3065</li> </ul>
 <p>MUX32-MC3132</p>	 <p>TB32</p>	<ul style="list-style-type: none"> <li>• 32-channel multiplexer</li> <li>• All 32 channels switch both HI and LO inputs</li> <li>• Support 4-wire measurement</li> <li>• The signal to be tested is connected through the TB32 terminal box</li> <li>• Can be connected with MC3065</li> </ul>
 <p>MUX64-MC3164</p>	 <p>TB64</p>	<ul style="list-style-type: none"> <li>• 64-channel single-ended multiplexer</li> <li>• All 64 channels can switch HI input only</li> <li>• Doesn't support 4-wire measurement</li> <li>• The signal to be tested is connected through the TB64 terminal box</li> <li>• Can be connected with MC3065</li> </ul>
 <p>REEDMUX32-MC3232</p>	 <p>TB32</p>	<ul style="list-style-type: none"> <li>• 32-channel reed multiplexer</li> <li>• All 32 channels can switch both HI and LO inputs</li> <li>• Support 4-wire measurement</li> <li>• The signal to be tested is connected through the TB32 terminal box</li> <li>• Can be connected with MC3065</li> </ul>
 <p>REEDMUX64-MC3264</p>	 <p>TB64</p>	<ul style="list-style-type: none"> <li>• 64-channel single-ended reed multiplexer</li> <li>• All 64 channels can switch HI input only</li> <li>• Doesn't support 4-wire measurement</li> <li>• The signal to be tested is connected through the TB64 terminal box</li> <li>• Can be connected with MC3065</li> </ul>
 <p>MIX24-MC3324</p>	 <p>TB24</p>	<ul style="list-style-type: none"> <li>• Mix multiplexer with 20 voltage channels and 4 current channels</li> <li>• All 20 voltage channels switch both HI and LO inputs</li> <li>• 20 voltage channels support 4-wire measurement</li> <li>• 4 current channels are used to measure DC current or AC current</li> <li>• The signal to be tested is connected through the TB24 terminal box</li> <li>• Can be connected with MC3065</li> </ul>

 <p>ACT-MC3416</p>	 <p>TB16</p>	<ul style="list-style-type: none"> <li>• 16-channel actuator</li> <li>• Can connect signal to the device under test or enable external device</li> <li>• Any of the 16 channels can switch to Normally-Open (NO) and Normally-Closed (NC) states</li> <li>• The signal is connected through the TB16 terminal box</li> </ul>
 <p>MFC-MC3534</p>	 <p>TB34</p>	<ul style="list-style-type: none"> <li>• Multifunction module</li> <li>• DIO: four 8-bit digital input/output ports</li> <li>• TOT: four totalizer input terminals</li> <li>• DAC: four analog output terminals</li> <li>• The signal is connected through the TB34 terminal box</li> </ul>
 <p>MATRIX-MC3648</p>	 <p>TB48</p>	<ul style="list-style-type: none"> <li>• 4 × 8 two-wire matrix switch</li> <li>• used to connect multiple devices to multiple points on the device under test</li> <li>• 32 two-wire cross points which can connect any combination of inputs and outputs at the same time</li> <li>• The signal is connected through the TB48 terminal box</li> </ul>
 <p>RFMUX-MC3724</p>		<ul style="list-style-type: none"> <li>• Dual 4-channel RF multiplexer</li> <li>• consists of two independent 4-to-1 multiplexers and can switch high frequency signal or pulse signal</li> </ul>

## ► Specifications

### DC Characteristics

Accuracy Specifications: ± (% of reading + % of range)<sup>[1]</sup>

Function	Range <sup>[2]</sup>	Test Current or Load Voltage	24 Hour <sup>[3]</sup> TCAL °C ± 1°C	90 Day TCAL °C ± 5°C	1 Year TCAL °C ± 5°C	Temperature Coefficient 0°C to (TCAL °C -5°C ) (TCAL °C +5°C ) to 50°C
DC Voltage	200.0000mV	–	0.0020 + 0.0020	0.0030 + 0.0025	0.0040 + 0.0025	0.0005 + 0.0005
	2.000000V	–	0.0015 + 0.0005	0.0020 + 0.0006	0.0035 + 0.0006	0.0005 + 0.0001
	20.00000V	–	0.0020 + 0.0004	0.0030 + 0.0005	0.0040 + 0.0005	0.0005 + 0.0001
	200.0000V	–	0.0020 + 0.0006	0.0040 + 0.0006	0.0050 + 0.0006	0.0005 + 0.0001
	300.000V	–	0.0020 + 0.0006	0.0040 + 0.0010	0.0055 + 0.0010	0.0005 + 0.0001
DC Current	200.0000 μ A	<0.03V	0.010 + 0.012	0.040 + 0.015	0.050 + 0.015	0.0020 + 0.0030
	2.000000mA	<0.25V	0.007 + 0.003	0.030 + 0.003	0.050 + 0.003	0.0020 + 0.0005
	20.00000mA	<0.07V	0.007 + 0.012	0.030 + 0.015	0.050 + 0.015	0.0020 + 0.0020
	200.0000mA	<0.7V	0.010 + 0.002	0.030 + 0.003	0.050 + 0.003	0.0020 + 0.0005
	1.000000A	<0.12V	0.050 + 0.020	0.080 + 0.020	0.100 + 0.020	0.0050 + 0.0010
Resistance <sup>[4]</sup>	200.0000 Ω	1mA	0.0030 + 0.0030	0.008 + 0.004	0.010 + 0.004	0.0006 + 0.0005
	2.000000k Ω	1mA	0.0020 + 0.0005	0.008 + 0.001	0.010 + 0.001	0.0006 + 0.0001
	20.00000k Ω	100 μ A	0.0020 + 0.0005	0.008 + 0.001	0.010 + 0.001	0.0006 + 0.0001
	200.0000k Ω	10 μ A	0.0020 + 0.0005	0.008 + 0.001	0.010 + 0.001	0.0006 + 0.0001
	1.000000M Ω	2 μ A	0.002 + 0.001	0.010 + 0.001	0.012 + 0.001	0.0010 + 0.0002
	10.00000M Ω	200nA	0.015 + 0.001	0.030 + 0.001	0.040 + 0.001	0.0030 + 0.0004
		200nA    10M Ω	0.300 + 0.010	0.800 + 0.010	0.800 + 0.010	0.1500 + 0.0002

NOTE: [1] Specifications are for 90-minute warm-up and 100 PLC integration time.

[2] 10% overrange on all ranges.

[3] Relative to calibration standards.

[4] Specifications are for 4-wire resistance measurement. Add 0.2 Ω additional error in 2-wire resistance measurement.



## Measuring Characteristics

<b>DC Voltage</b>	
Input Impedance	200mV, 2V, 20V ranges: 10MΩ or >10GΩ (For these ranges, input beyond ±26 V are clamped through 106 kΩ) 200V and 300V ranges: 10MΩ ± 1%
Input Protection	300V
Input Offset Current	50pA, at 25°C, typical
CMRR (common mode rejection ratio)	140 dB for 1 kΩ unbalanced resistance in LO lead, ±300 VDC peak maximum.
<b>Resistance</b>	
Measurement Method	4-wire or 2-wire resistance Current source referenced to LO input
Open-circuit Voltage	Limited to <10 V
Max. Lead Resistance (4-wire)	10% of range per lead for 200 Ω and 2 kΩ ranges, 1 kΩ per lead on all other ranges
Input Protection	300V on all ranges
Offset Compensation	Available on 200 Ω, 2 kΩ and 20 kΩ ranges.
<b>DC Current</b>	
Shunt Resistor	100 Ω for 200 uA, 2 mA 1 Ω for 20 mA, 200 mA 0.01 Ω for 2 A, 10 A
Auto Zero OFF Operation (typical value)	
Following instrument warm-up at the environment temperature ±1°C and <5 minutes, add 0.0001 % range + 2 uV error for DCV and 2 mΩ error for resistance.	
<b>Settling Considerations</b>	
Reading settling times are affected by source impedance, cable dielectric characteristics and input signal changes. The default measurement delay can ensure the correctness of the first reading for most measurements.	
<b>Measurement Considerations</b>	
Teflon or other high-impedance, low-dielectric absorption wire insulation is recommended for these measurements.	

## AC Characteristics

Accuracy Specifications: ± (% of reading + % of range)<sup>(1)</sup>

Function	Range <sup>(2)</sup>	Frequency Range	24 Hour <sup>(3)</sup> TCAL °C ± 1°C	90 Day T <sub>CAL</sub> °C ± 5°C	1 Year T <sub>CAL</sub> °C ± 5°C	Temperature Coefficient 0°C to (TCAL °C - 5°C) (TCAL °C + 5°C) to 50°C
True RMS AC Voltage <sup>(4)</sup>	200.0000mV	3Hz–5Hz	1.00 + 0.03	1.00 + 0.04	1.00 + 0.04	0.100 + 0.004
		5Hz–10Hz	0.35 + 0.03	0.35 + 0.04	0.35 + 0.04	0.035 + 0.004
		10Hz–20kHz	0.04 + 0.03	0.05 + 0.04	0.06 + 0.04	0.005 + 0.004
		20kHz–50kHz	0.10 + 0.05	0.11 + 0.05	0.12 + 0.05	0.011 + 0.005
		50kHz–100kHz	0.55 + 0.08	0.60 + 0.08	0.60 + 0.08	0.060 + 0.008
		100kHz–300kHz	4.00 + 0.50	4.00 + 0.50	4.00 + 0.50	0.20 + 0.02
	2.000000V	3Hz–5Hz	1.00 + 0.02	1.00 + 0.03	1.00 + 0.03	0.100 + 0.003
		5Hz–10Hz	0.35 + 0.02	0.35 + 0.03	0.35 + 0.03	0.035 + 0.003
		10Hz–20kHz	0.04 + 0.02	0.05 + 0.03	0.06 + 0.03	0.005 + 0.003
		20kHz–50kHz	0.10 + 0.04	0.11 + 0.05	0.12 + 0.05	0.011 + 0.005
		50kHz–100kHz	0.55 + 0.08	0.60 + 0.08	0.60 + 0.08	0.060 + 0.008
		100kHz–300kHz	4.00 + 0.50	4.00 + 0.50	4.00 + 0.50	0.20 + 0.02
200.0000V	200.0000V	3Hz–5Hz	1.00 + 0.02	1.00 + 0.03	1.00 + 0.03	0.100 + 0.003
		5Hz–10Hz	0.35 + 0.02	0.35 + 0.03	0.35 + 0.03	0.035 + 0.003
		10Hz–20kHz	0.04 + 0.02	0.07 + 0.03	0.08 + 0.03	0.008 + 0.003
		20kHz–50kHz	0.10 + 0.04	0.12 + 0.05	0.15 + 0.05	0.012 + 0.005
		50kHz–100kHz	0.55 + 0.08	0.60 + 0.08	0.60 + 0.08	0.060 + 0.008
		100kHz–300kHz	4.0 + 0.50	4.0 + 0.50	4.0 + 0.50	0.20 + 0.02
	300.000V	3Hz–5Hz	1.00 + 0.02	1.00 + 0.03	1.00 + 0.03	0.100 + 0.003
		5Hz–10Hz	0.35 + 0.02	0.35 + 0.03	0.35 + 0.03	0.035 + 0.003
		10Hz–20kHz	0.04 + 0.02	0.07 + 0.03	0.08 + 0.03	0.008 + 0.003
		20kHz–50kHz	0.10 + 0.04	0.12 + 0.05	0.15 + 0.05	0.012 + 0.005
		50kHz–100kHz	0.55 + 0.08	0.60 + 0.08	0.60 + 0.08	0.060 + 0.008
		100kHz–300kHz	4.0 + 0.50	4.0 + 0.50	4.0 + 0.50	0.20 + 0.02



True RMS AC Current <sup>[6]</sup>	200.0000 $\mu$ A	3Hz–5Hz	1.10 + 0.06	1.10 + 0.06	1.10 + 0.06	0.200 + 0.006
		5Hz–10Hz	0.35 + 0.06	0.35 + 0.06	0.35 + 0.06	0.100 + 0.006
		10Hz–5kHz	0.15 + 0.06	0.15 + 0.06	0.15 + 0.06	0.015 + 0.006
		5kHz–10kHz	0.35 + 0.70	0.35 + 0.70	0.35 + 0.70	0.030 + 0.006
	2.000000mA	3Hz–5Hz	1.00 + 0.04	1.00 + 0.04	1.00 + 0.04	0.100 + 0.006
		5Hz–10Hz	0.30 + 0.04	0.30 + 0.04	0.30 + 0.04	0.035 + 0.006
		10Hz–5kHz	0.12 + 0.04	0.12 + 0.04	0.12 + 0.04	0.015 + 0.006
		5kHz–10kHz	0.20 + 0.25	0.20 + 0.25	0.20 + 0.25	0.030 + 0.006
	20.00000mA	3Hz–5Hz	1.10 + 0.06	1.10 + 0.06	1.10 + 0.06	0.200 + 0.006
		5Hz–10Hz	0.35 + 0.06	0.35 + 0.06	0.35 + 0.06	0.100 + 0.006
		10Hz–5kHz	0.15 + 0.06	0.15 + 0.06	0.15 + 0.06	0.015 + 0.006
		5kHz–10kHz	0.35 + 0.70	0.35 + 0.70	0.35 + 0.70	0.030 + 0.006
	200.0000mA	3Hz–5Hz	1.00 + 0.04	1.00 + 0.04	1.00 + 0.04	0.100 + 0.006
		5Hz–10Hz	0.30 + 0.04	0.30 + 0.04	0.30 + 0.04	0.035 + 0.006
		10Hz–5kHz	0.10 + 0.04	0.10 + 0.04	0.10 + 0.04	0.015 + 0.006
		5kHz–10kHz	0.20 + 0.25	0.20 + 0.25	0.20 + 0.25	0.030 + 0.006
	1.000000A	3Hz–5Hz	1.10 + 0.06	1.10 + 0.06	1.10 + 0.06	0.100 + 0.006
		5Hz–10Hz	0.35 + 0.06	0.35 + 0.06	0.35 + 0.06	0.035 + 0.006
		10Hz–5kHz	0.15 + 0.06	0.15 + 0.06	0.15 + 0.06	0.015 + 0.006
		5kHz–10kHz	0.35 + 0.70	0.35 + 0.70	0.35 + 0.70	0.030 + 0.006
5Hz–10Hz		0.35 + 0.08	0.35 + 0.10	0.35 + 0.10	0.035 + 0.008	
		10Hz–5kHz	0.15 + 0.08	0.15 + 0.10	0.15 + 0.10	0.015 + 0.008

NOTE: [1] Specifications are for 90-minute warm-up, slow ac filter and sine wave input.

[2] 10% overrange on all ranges.

[3] Relative to calibration standards.

[4] Specifications are for sine wave input >5% of range. For inputs from 1% to 5% of range and <50 kHz, add 0.1% of range additional error. For 50 kHz to 100 kHz, add 0.13% of range.

[5] When the frequency is lower than 100 Hz, the specification of slow filter is only for sine wave input.

[6] Specifications are for sine wave input >5% of range. For inputs from 1% to 5% of range, add 0.1% of range additional error. Specifications are typical values for 200  $\mu$ A, 2 mA, 2 A and 10 A ranges when frequency is >1 kHz.

## Measuring Characteristics

True RMS AC Voltage	
Measurement Method	AC-coupled True-RMS -- measure the ac component of input with up to 300 V DC bias on any range.
Crest Factor	$\leq 5$ at full range
Input Impedance	1 M $\Omega$ $\pm$ 2%, in parallel with <150 pF capacitance on any range
Input Protection	300 V rms on all ranges
AC Filter Bandwidth	Slow: 3 Hz – 300 kHz Medium: 20 Hz – 300 kHz Fast: 200 Hz – 300 kHz
CMRR (common mode rejection ratio)	70 dB, for the 1 k $\Omega$ unbalance in LO lead, <60 Hz common mode signal frequency, $\pm$ 500 VDC peak maximum.
True RMS AC Current	
Measurement Method	Direct coupled to the fuse and shunt; AC-coupled True RMS measurement (measure the AC component).
Crest Factor	$\leq 3$ at full range
Max. Input	DC + AC current peak value <300% of range. Current with DC current component <10 A rms.
Shunt Resistor	100 $\Omega$ for 200 $\mu$ A, 2 mA 1 $\Omega$ for 20 mA, 200 mA 0.01 $\Omega$ for 1 A

## Settling Time Considerations

The default measurement delay of the multimeter can ensure the correctness of the first readings of most of the measurements. Make sure the RC circuit of input terminal has been fully settled (about 1 s) before accurate measurement.

## Frequency and Period Characteristics

Accuracy Specifications:  $\pm$  (% of reading)<sup>[1][2]</sup>

Function	Range	Frequency Range	24 Hour <sup>[3]</sup> $T_{CAL} \text{ } ^\circ\text{C} \pm 1^\circ\text{C}$	90 Day $T_{CAL} \text{ } ^\circ\text{C} \pm 5^\circ\text{C}$	1 Year $T_{CAL} \text{ } ^\circ\text{C} \pm 5^\circ\text{C}$	Temperature Coefficient 0°C to ( $T_{CAL} \text{ } ^\circ\text{C} - 5^\circ\text{C}$ ) ( $T_{CAL} \text{ } ^\circ\text{C} + 5^\circ\text{C}$ ) to 50°C
Frequency, Period	200mV–300V	3 Hz–5 Hz	0.07	0.07	0.07	0.005
		5 Hz–10 Hz	0.04	0.04	0.04	0.005
		10 Hz–40 Hz	0.02	0.02	0.02	0.001
		40 Hz–300 kHz	0.005	0.006	0.007	0.001
		300 kHz–1 MHz	0.005	0.006	0.007	0.001

Additional Low Frequency Errors: (% of reading)

Frequency	Gate Time (Resolution)			
	1s ( 0.1ppm )	0.1s ( 1ppm )	0.01s ( 10ppm )	0.001s ( 100ppm )
3 Hz–5Hz	0	0.12	0.12	0.12
5 Hz–10Hz	0	0.17	0.17	0.17
10 Hz–40Hz	0	0.20	0.20	0.20
40 Hz–100Hz	0	0.06	0.21	0.21
100 Hz–300Hz	0	0.03	0.21	0.21
300 Hz–1 kHz	0	0.01	0.07	0.07
>1kHz	0	0	0.02	0.02

NOTE: [1] Specifications are for 90 minutes warm-up and 1 s gate time.

[2] For frequency  $\leq$  300 kHz, the specification is for AC input voltage of 10% to 110% of range. For frequency >300 kHz, the specification is for AC input voltage of 20% to 110% of range. The maximum input is limited to 750 Vrms or 8 x 107 Volts–Hz (whichever is less). 200 mV range is full range input or input that is larger than the full range.

For 20 mV to 200 mV inputs, multiply % of reading error by 10.

[3] Relative to calibration standards.

### Measuring Characteristics

Frequency and Period	
Measurement Method	Reciprocal–counting technique, AC–coupled input using the AC voltage function.
Input Impedance	1 M $\Omega$ $\pm$ 2%, in parallel with <150 pF capacitance on any range
Input Protection	300 Vrms on all ranges
Measurement Considerations	
All frequency counters are susceptible to error when measuring low–voltage, low–frequency signals. Shielding inputs from external noise pickup is critical for minimizing measurement errors.	
Settling Considerations	
Errors will occur when attempting to measure the frequency or period of an input following a dc offset voltage change. The input blocking RC time constant must be allowed to fully settle (about 1 s) before the most accurate measurements are possible.	

## Temperature Characteristics

Accuracy Specifications<sup>[1]</sup>

Function	Probe Type	Type	Optimum Range	1 Year $T_{CAL} \text{ } ^\circ\text{C} \pm 5^\circ\text{C}$	Temperature Coefficient 0°C to ( $T_{CAL} \text{ } ^\circ\text{C} - 5^\circ\text{C}$ ) ( $T_{CAL} \text{ } ^\circ\text{C} + 5^\circ\text{C}$ ) to 50°C
Temperature	RTD <sup>[2]</sup> (R0 is within 49 $\Omega$ and 2.1 k $\Omega$ )	$\alpha = 0.00385$	–200°C – 660°C	0.16°C	0.01°C
		$\alpha = 0.00389$	–200°C – 660°C	0.17°C	0.01°C
		$\alpha = 0.00391$	–200°C – 660°C	0.14°C	0.01°C
		$\alpha = 0.00392$	–200°C – 660°C	0.15°C	0.01°C
	Thermal Resistance	2.2 k $\Omega$	–40°C – 150°C	0.08°C	0.002°C
		3 k $\Omega$	–40°C – 150°C	0.08°C	0.002°C
		5 k $\Omega$	–40°C – 150°C	0.08°C	0.002°C
		10 k $\Omega$	–40°C – 150°C	0.08°C	0.002°C
		30 k $\Omega$	–40°C – 150°C	0.08°C	0.002°C
	Thermocouple <sup>[3]</sup>	B	0°C – 1820°C	0.76°C	0.14°C
		E	–270°C – 1000°C	0.5°C	0.02°C
		J	–210°C – 1200°C	0.5°C	0.02°C
		K	–270°C – 1372°C	0.5°C	0.03°C
		N	–270°C – 1300°C	0.5°C	0.04°C
R		–50°C – 1768.1°C	0.5°C	0.09°C	
S		–50°C – 1768.1°C	0.6°C	0.11°C	
T	–270°C – 400°C	0.5°C	0.03°C		

NOTE: [1] Specifications are for 90 minutes warm-up. Probe error excluded.

[2] Specification is for 4WR resistance measurement.

[3] Relative to cold junction temperature, accuracy is based on ITS–90. Built-in cold junction temperature refers to the temperature of the connector inside the terminal block and its accuracy is  $\pm 2.5^\circ\text{C}$ .

## Measuring Characteristics

Thermocouple	
Conversion	ITS-90 software compensation
Reference Junction Type	Internal, Fixed, or External
T/C Check	Selectable per channel. When the channel resistance is $>5k\Omega$ , it is considered as Open.
RTD	
Alpha	= 0.00385 (DIN/IEC 751): using ITS-90 software compensation; = 0.00389, 0.00391 or 0.00392: using IPTS-68 software compensation
Thermistor	
	44004, 44007, 44006 series

## Measurement Considerations

The built-in cold junction temperature tracks the temperature inside the terminal box. The change of temperature in the terminal box might cause additional error. When using the built-in cold junction compensation, connect the sensor terminal of the thermocouple to the terminal box and warm it up for more than 3 minutes to minimize the error.

## Module Specifications

MC3120/MC3132/MC3164/MC3232/MC3264/MC3324/MC3416/MC3648

General	Multiplexer						Actuator	Matrix
	MC3120	MC3132	MC3164	MC3232	MC3264	MC3324	MC3416	MC3648
Number of Channels	20	32	64	32	64	20 Voltage+4 Current	16	4 × 8
Connect to DMM Module?	Yes	Yes	Yes	Yes	Yes	Yes	No	No
Scanning Speed <sup>[4]</sup>	60Ch/s	60Ch/s	60Ch/s	250Ch/s	250Ch/s	60Ch/s	—	—
Open/Close Speed	200Ch/s	200Ch/s	200Ch/s	1000Ch/s	1000Ch/s	200Ch/s	200Ch/s	200Ch/s
Maximum Input								
Voltage (DC, AC rms)	300Vrms	300Vrms	300Vrms	150Vrms	150Vrms	300Vrms	300Vrms	300Vrms
Current (DC, AC rms)	1Arms	1Arms	1Arms	100mArms	100mArms	1Arms	2Arms	1Arms
Power (W, VA)	50VA	50VA	50VA	5VA	5VA	50VA	60VA	50VA
Isolation (ch–ch, ch–earth) (DC, AC rms)	300Vrms	300Vrms	300Vrms	150Vrms	150Vrms	300Vrms	300Vrms	300Vrms
DC Characteristics								
Offset Voltage	5uV	5uV	5uV	<40uV	<40uV	5uV	<3uV	5uV
Initial Closed Channel Resistance	<1Ω	<1Ω	<1Ω	<1.5Ω	<1.5Ω	<1Ω	<0.1Ω	<1Ω
Isolation (ch–ch, ch–earth)	>10GΩ	>10GΩ	>10GΩ	>10GΩ	>10GΩ	>10GΩ	>10GΩ	>10GΩ
AC Characteristics								
Bandwidth	1MHz	1MHz	1MHz	1MHz	1MHz	1MHz	1MHz	1MHz
Ch–Ch Cross Talk (dB) <sup>[5]</sup> 1MHz	–45	–45	–18 <sup>[6]</sup>	– 40	– 33	–45	– 15	–18
Capacitance HI–LO	100pF	100pF	100pF	<80pF	<80pF	100pF	<500pF	100pF
Capacitance LO–Earth	200pF	200pF	200pF	<200pF	<200pF	200pF	<200pF	200pF
Volt–Hertz Limit	10 <sup>8</sup>	10 <sup>8</sup>	10 <sup>8</sup>	10 <sup>8</sup>	10 <sup>8</sup>	10 <sup>8</sup>	10 <sup>8</sup>	10 <sup>8</sup>
Other								
T/C Cold Junction Accuracy (Typical)	0.8°C	0.8°C	0.8°C <sup>[7]</sup>	0.8°C	0.8°C	0.8°C	—	—
Switch Life (No Load) (Typical)	100M	100M	100M	100M	100M	100M	100M	100M
Switch Life (Rated Load) (Typical) <sup>[8]</sup>	100K	100K	100K	100K	100K	100K	100K	100K
Operating Temperature	0°C – 55°C	0°C – 55°C	0°C – 55°C	0°C – 55°C	0°C – 55°C	0°C – 55°C	0°C – 55°C	0°C – 55°C
Storage Temperature	–20°C – 70°C	–20°C – 70°C	–20°C – 70°C	–20°C – 70°C	–20°C – 70°C	–20°C – 70°C	–20°C – 70°C	–20°C – 70°C
Humidity (non–condensing)	40°C / 80% RH	40°C / 80% RH	40°C / 80% RH	40°C / 80% RH	40°C / 80% RH	40°C / 80% RH	40°C / 80% RH	40°C / 80% RH

NOTE: [1] 20 channel multiplexer can be used as 20 2–wire or 10 4–wire measurement channels and 32 channel multiplexer can be used as 32 2–wire or 16 4–wire measurement channels.

[2] 64 channel multiplexer share a Common Low for two banks of 32 channels.

[3] 24 Channel multiplexer can be configured as 20 2–wire voltage channels or 10 4–wire voltage channels in addition to the 4 current channels.

[4] Integration time: 0.02PLC, channel delay: 0, auto zero: off, alarm: off, scaling: off, display: off, data to internal memory.

[5] 50Ω load.

[6] Isolation within banks is –40dB.

[7] Specifications are for the LO setting and not the temperature of the cold terminal.

[8] Applies to resistive loads only.

## MC3534

Digital Input/Output (DIO)					
Port 1,2,3,4	8-bit, input or output, non-isolated				
Type	Vin(L)	Vin(H)	Vout(L)	Vout(H)	Vin(H) Max
TTL	<0.8V	>2.0V	<0.2V@ $I_{out}=-500mA$	>4.8V@ $I_{out}=1mA$	<42V with external open drain pull-up
5V CMOS	<1.5V	>3.5V	<0.2V@ $I_{out}=-500mA$	>4.8V@ $I_{out}=1mA$	
3.3V CMOS	<1.0V	>2.3V	<0.2V@ $I_{out}=-500mA$	>3.15V@ $I_{out}=1mA$	
2.5V CMOS	<0.75V	>1.75V	<0.2V@ $I_{out}=-500mA$	>2.35V@ $I_{out}=1mA$	
User defined	Threshold-0.3V	Threshold+0.3V	<0.2V@ $I_{out}=-500mA$	>(Level-0.2V)@ $I_{out}=1mA$	
Alarming	Match or mismatch, maskable				Match or mismatch, maskable
Speed	4ms (Max) alarm sampling				4ms (Max) alarm sampling
Latency	5ms				5ms
Read/Write Speed	100/s				100/s
Totalizer Input (TOT)					
	High Speed (TOT1,TOT2)		Normal Speed (TOT3,TOT4)		
Maximum Count	$2^{32}-1$		$2^{32}-1$		
Totalizer Input	10MHz (max), rising or falling edge, programmable		100kHz (max), rising or falling edge, programmable		
Signal Level	CMOS 3.3V,5V tolerable		1Vp-p(min),42Vpk(max), $V_{cm}=-12V\sim+12V$		
Threshold	Fixed at CMOS 3.3V		-12V~+12V, Programmable		
Gated Input	CMOS 3.3V-Hi, CMOS 3.3V-Lo or none, 5V tolerance		CMOS 3.3V-Hi, CMOS 3.3V-Lo or none, 5V tolerance		
Count Reset	Manual or Read + Reset		100/s		
Read Speed	100/s				
Analog Voltage Output (DAC)					
DAC 1,2,3,4	$\pm 12V$ , non-isolated (earth referenced)				
Resolution	1mV				
Iout	10mA max				
Setting Time	1ms to 0.01 % of output				
Accuracy	$\pm$ ( % of output + mV)				
1 year $\pm 5^{\circ}C$	0.25%+20mV				
Temp Coefficient	$\pm$ (0.015%+1mV)/ $^{\circ}C$				

## General Specifications


Display	4.3 inches
Power Supply	AC 100V – 120V, 45Hz – 440Hz AC 200V – 240V, 45Hz – 66Hz Detect the power frequency automatically at power-on, 400 Hz defaults to 50 Hz
Power Consumption	25 VA Max
Working Environment	Full accuracy for 0 $^{\circ}C$ to 50 $^{\circ}C$ Full accuracy to 80% R.H. at 40 $^{\circ}C$ Non-coagulation
Storage Temperature	-40 $^{\circ}C$ to 70 $^{\circ}C$
Operation Altitude	Up to 2000 meters
Safety	IEC 61010-1; EN 61010-1; UL 61010-1; CAN/CSA-C22.2 No. 61010-1 Measurement CAT I 1000V/CAT II 300V Pollution Degree 2
EMC	EN 61326-1
Weight	About 5.7 kg (without package)
Dimension	(height $\times$ width $\times$ length): 159.0mm $\times$ 239.0mm $\times$ 373.4mm
Remote Interface	GPIB, 10/100Mbit LAN, USB 2.0 Full Speed Device & Host (support USB storage device), RS-232
Programming Language	SCPI
LXI Compatibility	LXI Core Device 2011, Version 1.4
Warm-up Time	90 minutes



## ► Ordering Information

	Description	Ordering No.
Mainframe	Data Acquisition/Switch System	M300
	Data Acquisition/Switch System + DMM Module	M301
Standard Accessories	Power Cord conforming to the standard of the country	–
	USB Cable	CB-USBA-USBB-FF-150
	Mixed-interface Separator Line	MIX-SEPARATOR
	M300 Series standard control and data analysis PC Software	Ultra Acquire
	Four Spare Fuses: 2 AC, 250 V, T3.15 A fuses 2 AC, 250 V, T250 mA fuses	–
	Quick Guide	–
	Resource CD (User's Guide and Ultra Acquire Software)	–
Optional Accessories: Module	DMM Module (6½ digits)	MC3065
	20-channel Multiplexer	MC3120
	32-channel Multiplexer	MC3132
	64-channel Single-ended Multiplexer	MC3164
	32-channel Reed Multiplexer	MC3232
	64-channel Single-ended Reed Multiplexer	MC3264
	20-voltage-channel+4-current-channel Mixed Multiplexer	MC3324
	16-channel Actuator	MC3416
	Multifunction Module	MC3534
	4 × 8 Matrix Switch	MC3648
Optional Accessories: Terminal Box	Dual 4-channel RF Multiplexer	MC3724
	MC3120 Terminal Box	M3TB20
	MC3132/ MC3232 Terminal Box	M3TB32
	MC3164/MC3264 Terminal Box	M3TB64
	MC3324 Terminal Box	M3TB24
	MC3648 Terminal Box	M3TB48
	MC3534 Terminal Box	M3TB34
MC3416 Terminal Box	M3TB16	
Optional Accessories	RS232 Cable	–
	External Port for Analog Bus Interface	A-BUS-EXT-PORT
	Rack Mount Kit	RM-1-M300
	Rack Mount Kit for Two Instruments	RM-2-M300
	M300 Series control and advanced data analysis PC Software	Ultra Acquire Pro

**Distributed By:**  
**Signal Test, Inc**  
**1529 Santiago Ridge Way**  
**San Diego, CA 92154**  
**Tel. 1-619-575-1577 USA**  
**www.SignalTestInc.com**  
**Sales@SignalTestInc.com**

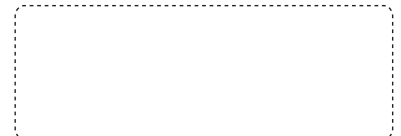

**RIGOL®** is the registered trademark of RIGOL Technologies, Inc. Product information in this document subject to update without notice. For the latest information about RIGOL's products, applications and services, please contact local RIGOL office or access RIGOL official website:

[www.rigol.com](http://www.rigol.com)