

Connectors, Adapters, and Tools


Model	Name	Use With:
213-CON	Analog Output Connector	Instruments with 12-pin analog connectors
237-BAN-3A	Triax to Banana Plug	4200-SCS, 7072, 7072-HV, DMMS
237-BNC-TRX	3-Lug Female Triax to Male BNC Connector with guard disconnected	237, 4200-SCS, 6517A, 6517B, 7078-TRX cables
237-TRX-BAR	3-Lug Triax Female to Female Barrel Adapter	2635, 2635A, 2636, 2636A, 4200-SCS, Triax interconnect
237-TRX-NG	Triax Male-Female Adapter with guard disconnected	237, 6517A, 6517B, 7072, 7072-HV
237-TRX-T	3-slot Male to Dual 3-Lug Female Triax Tee Adapter	4200-SCS, 7072, 7072-HV, 7078-TRX cables
237-TRX-TBC	3-Lug Female Triax Bulkhead Connector	7072, 7072-HV, 7078-TRX cables
2182-325A	Silver Solder for use with 2182-KIT	2182A
2182-KIT	Low-Thermal Connector with Strain Relief (LEMO)	2182A, SC-93
2188	Low-Thermal Calibration Shorting Plug	2182A
2499-DIGIO	Digital I/O Expansion Module	SourceMeter instruments
2500INT-SMA	SMA Connector	2500INT integrating sphere
2500INT-FC/PC	FP/PC Connector	2500INT integrating sphere
2500INT-FC/APC	FP/APC Connector	2500INT integrating sphere
2600-IAC	Safety Interlock Adapter Connector	2611, 2612, 2635, 2636, 2611A, 2612A, 2635A, 2636A
2600-KIT	Screw Terminal Connector with Strain Relief and Cover	2601, 2602 (2 needed), 2611, 2612 (2 needed), 2601A, 2602A (2 needed), 2611A, 2612A (2 needed)
2600-TRIAx	3-Lug Triax Adapter	2601, 2602 (2 needed), 2611, 2612 (2 needed), 2601A, 2602A (2 needed), 2611A, 2612A (2 needed)
3706-BKPL	Analog Backplane Extender Board	3706
3720-ST	Screw Terminal Block	3720
3721-ST	Screw Terminal Block	3721
3723-ST	Screw Terminal Block	3723
3723-ST-1	Screw Terminal Block	3723
3724-ST	Screw Terminal Block	3724
3730-ST	Screw Terminal Block	3730
3731-ST	Screw Terminal Block	3731
3740-ST	Screw Terminal Block	3740
3750-ST	Screw Terminal Block	3750
3790-KIT50-R	50-pin Female D-sub Connector Kit	3721, 3730, 3731, 3740, 3750
3791-CIT	Contact Insertion and Extraction Tool	3720, 3722, 3723
3791-KIT78-R	78-pin Female D-sub Connector Kit	3720, 3723, 3724
3792-KIT104-R	104-pin Male D-sub Connector Kit	3722
3792-KIT104-R/F	104-pin Female D-sub Connector Kit	3722
4851	BNC Shorting Plug	Instruments with BNC connectors
6171	3-slot Male to 2-Lug Female Triax Adapter	2-lug triax connectors
6172	2-slot Male to 3-Lug Female Triax Adapter	7065, 2500INT

Model	Name	Use With:
7001-PNL	Metal Plate	7001
7011-KIT-R	Female 96-pin Connector Kit	7011-C, 7012-C, 7013-C, 7015-C, 7018-C
7011-MTR	Bulkhead Mount 96-pin Male Connector	7011-KIT-R, 7011-C, 7012-C, 7013-C, 7015-C, 7018-C
7011-ST	Extra Screw Terminal Board	7011-S
7012-ST	Extra Screw Terminal Board	7012-S
7013-ST	Extra Screw Terminal Board	7013-S
7014-ST	Extra Screw Terminal Board	7014
7015-ST	Extra Screw Terminal Board	7015-S
7018-ST	Extra Screw Terminal Board	7018-S
7072-TRT	Triax Removal Tool	707B, 708B
7074-CIT	Contact Extraction Tool	7152-KIT, 7152-MTR
7074-HCT	Hand Crimping Tool	7152-KIT, 7152-MTR
7078-CIT	Contact Insertion/Extraction Tool	7078-KIT, 7078-MTR, 7152-KIT, 7152-MTR
7078-HCT	Hand Crimping Tool for 7078-KIT, 7169-KIT	7078-KIT
7078-KIT	Connector Kit	7071, 7071-4, 7074-D, 7078-MTR
7078-MTR	Mass Terminated Receptacle, Bulkhead Mount	7071, 7071-4, 7078-KIT, 7078-MTC
7078-TRX-BNC	3-slot Male Triax to BNC Adapter	486, 487, 4210-CVU, 4801, 6514, 6517A, 6517B, 7072, 7072-HV
7078-TRX-GND	3-slot Male Triax to BNC Adapter (guard removed)	237, 4200-SCS, 4801, 6517A, 6517B, 7051, 7072, 7072-HV, Series 2600, Series 2600A
7078-TRX-TBC	3-Lug Female Triax Bulkhead Connector w/Cap	7078-TRX cables
7152-HCT	Hand Crimp Tool for 7152-KIT, 7152-MTR	7152-KIT, 7152-MTR
7152-KIT	6-Position M-Series Plug w/Contacts	7152, 7152-MTR
7152-MTR	6-Position M-Series Receptacle w/Sockets	7152, 7152-KIT, 7152-MTC-2, 7152-MTC-10
7703-306A	DB50 Male Connector Kit	7701, 7703, 7705, 7709
7709-308A	DB25 Male Connector Kit	7701, 7707, 7709
7712-SMA-N	Female SMA to Male N-Type Adapter	7711, 7712
7755	50Ω Feed-Through Terminator	RG 58 cable, 776, 3390
7788	50-pin D Subconnector Kit	7703, 7705, 77XX, modules with D sub connectors
7789	50-pin Male and 25-pin Male D-Shell Connector Kit	7701, 7709
7790	50-pin Male, 50-pin Female, and 25-pin Male IDC D-Shell Connector Kit	7701, 7703, 7705, 7707, 7709
8610	Low Thermal Shorting Plug	2000, 2001, 2002, 2010
8620	4-Wire DMM Shorting Plug	2000, 2001, 2002, 2010, 2015, 2016, Series 2400, Series 2700, Series 3700
8680	RTD Probe Adapter	2001, 2002, 2010

Connectors, Adapters, and Tools


Model	Name	Use With:
BG-18	Dual Banana to BNC Coaxial Adapter	230, Series 2000, Series 2400, 2700, 2750
CAP-18	Protective Shield/Cap	BNC, 2-lug triax connectors
CAP-31	Protective Shield/Cap	3-lug triax connectors
CS-400	DB25 Male Solder Cup	CA-126-1 cable, 213
CS-458	Interlock Connector Kit	6517-ILC-3
CS-565	BNC Barrel, 4200-SCS	BNC interconnect
CS-630	3-Lug Female Triax Bulkhead Connector	6487, 6517A, 6517B
CS-631	3-Lug Male Triax Cable Mount Connector	4200-SCS, SC-22 cable
CS-701	BNC Tee Adapter (Female-Male-Female)	4200-SCS
CS-719	3-Lug Triax Jack Receptacle	4200-SCS
CS-846	Screw Terminal Test Lead Connector	230X, 2510, 2510-AT
CS-970	High Voltage Bulkhead Connector	248, 248-SHV cable

Model	Name	Use With:
CS-1247	SMA Female to BNC Male Adapter	4200-SCS
CS-1249	SMA Female to SMB Plug Adapter	4200-SCS
CS-1251	BNC Female to SMB Plug Adapter	4200-SCS
CS-1252	SMA Male to BNC Female Adapter	4200-SCS
CS-1281	SMA Female to SMA Female Adapter	4200-SCS
CS-1305	Interlock Connector	6517B
CS-1382	Female MMBX Jack to Male SMA Plug Adapter	4200-SCS
CS-1390	Male LEMO Triax to Female SMA Adapter	4200-SCS
CS-1391	SMA Tee Adapter (Female-Male-Female)	4200-SCS
CS-1423-3	Miniature Mating Connector	2635, 2636, 2635A, 2636A
CS-1479	SMA Male to BNC Male Adapter	4200-SCS
TL-24	SMA Torque Wrench	4200-SCS, System 46, System 46T

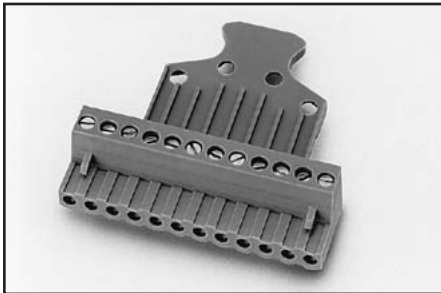

Model 213-CON Analog Output Connector: Quick disconnect analog output connector for Model 213 Quad Voltage Source. Screw terminals provided for connection of test leads.

For use with: Instruments with 12-pin analog connectors

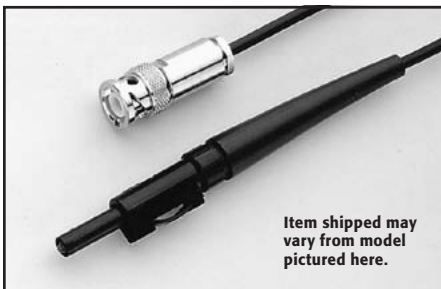

Item shipped may vary from model pictured here.

Model 237-BAN-3A Triax to Banana Plug: Triax cable center conductor terminated in a safety banana plug (guard and shield open). For connecting DMMs and other banana jack instruments to a matrix or fixture.

For use with: 4200-SCS, 7072, 7072-HV, DMMs



Model 237-BNC-TRX: Male BNC to 3-lug female triax adapter (guard disconnected). Terminates triax cable in BNC plug. High voltage rating for use with 237 and 7072-HV.

For use with: 237, 4200-SCS, 6517A, 6517B, 7078-TRX cables



Model 237-TRX-BAR: 3-lug triax barrel (female to female) for use with triax interconnect.

For use with: 2635, 2635A, 2636, 2636A, 4200-SCS, triax interconnect



Model 237-TRX-NG: 3-slot triax to 3-lug female triax adapter (guard removed) for non-guarded measurements. High voltage rating for use with 237, 7072-HV, etc.

For use with: 237, 6517A, 6517B, 7072, 7072-HV



Model 237-TRX-T: 3-slot male to dual 3-lug female triax tee adapter for use with 7078-TRX cables and 7072/7072-HV Semiconductor Matrix Cards. High voltage rating for use with Models 237 SMU and 6517B Electrometer.

For use with: 237, 4200-SCS, 6517A, 6517B, 7072, 7072-HV, 7078-TRX cables

Connectors, Adapters, and Tools



Model 237-TRX-TBC: 3-lug female triax bulkhead connector with cap for assembly of custom panels and interface connections. High voltage rating for use with 237, 7072-HV, etc. Uses miniature coax cable, not triax cable, at soldered end. Bulkhead is outer shield.

For use with: 7072, 7072-HV, 7078-TRX cables

Model 2182-325A: Silver solder for making connections in experiments with the Model 2182A. 20 ft roll.

For use with: 2182A



Model 2182-KIT Low-Thermal Connector with Strain Relief: Connector kit for building a custom input cable for the Model 2182A Nanovoltmeter. Includes a low-thermal (LEMO) connector and a strain relief.

For use with: 2182A, SC-93



Model 2188 Low-Thermal Calibration Shorting Plug: A low-resistance, low-thermal shorting plug required to calibrate the Model 2182A Nanovoltmeter. Made of a LEMO connector with its pin connectors shorted together using copper wire and Sn/Ag4 silver solder.

For use with: 2182A



Model 2499-DIGIO: Digital I/O expansion module that plugs onto the DB-9 connector of a SourceMeter® instrument. Expands the three digital I/O lines of the SourceMeter to 16 lines. The SOT, EOT/BUSY, 5V, GND, and Interlock signals are passed through.

Services Available: 1-year factory warranty extended to 3 years from date of shipment

For use with: SourceMeter Instruments

Model 2500INT-FC/APC: FC/APC connector for 2500-INT Integrating Sphere.

For use with: 2500-INT



Model 2500INT-FC/PC: FC/PC connector for 2500-INT Integrating Sphere.

For use with: 2500-INT




Model 2500INT-SMA: SMA connector for 2500-INT Integrating Sphere.

For use with: 2500-INT



Model 2600-IAC: Safety interlock adapter connector.

For use with: 2611, 2612, 2635, 2636, 2611A, 2612A, 2635A, 2636A

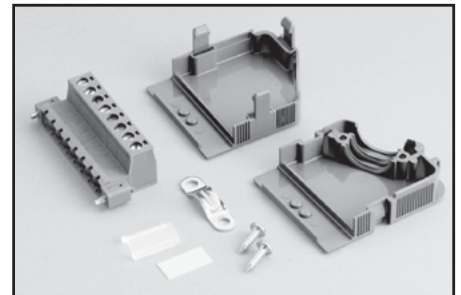

Model 2600-KIT: Extra screw terminal connector, strain relief, and cover for a single SourceMeter channel (two needed for use with Models 2602, 2612, 2602A, and 2612A).

For use with: 2601, 2602, 2611, 2612, 2601A, 2602A, 2611A, 2612A

Connectors, Adapters, and Tools




Model 2600-TRIAx: Triax adapter for a single Series 2600 or 2600A SourceMeter channel (two needed for use with Models 2602, 2602A, 2612, and 2612A). For use with standard 3-lug triax cables.

For use with: 2601, 2602, 2611, 2612, 2601A, 2602A, 2611A, 2612A



Model 3721-ST: Screw Terminal Block. Required with the Model 3721 for automatic CJC thermocouple measurements.

For use with: 3721

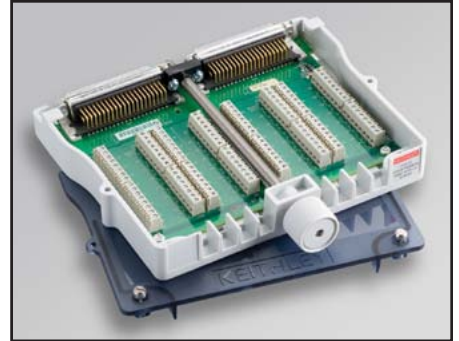

Model 3724-ST: Screw Terminal Block.

For use with: 3724




Model 3706-BKPL: Analog backplane extender board, 15-pin D-sub to terminal block.

For use with: Series 3700



Model 3723-ST: Screw Terminal Block. Accessory for Model 3723 for two-pole applications.

For use with: 3723

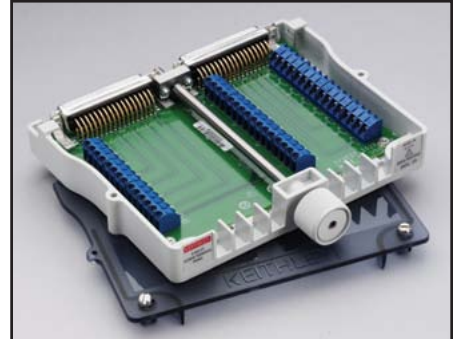

Model 3730-ST: Screw Terminal Block.

For use with: 3730




Model 3720-ST: Screw Terminal Block. Required with the Model 3720 for automatic CJC thermocouple measurements.

For use with: 3720



Model 3723-ST-1: Screw Terminal Block. Accessory for the Model 3723 for single-pole applications.

For use with: 3723

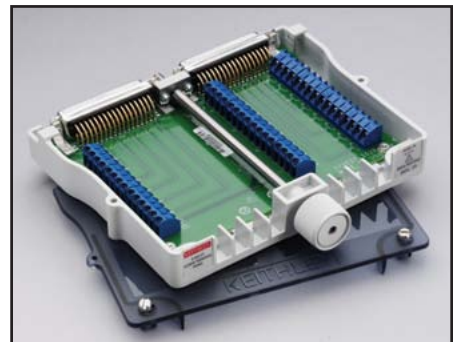

Model 3731-ST: Screw Terminal Block.


For use with: 3731

Connectors, Adapters, and Tools



Model 3732-ST-C: Screw Terminal Block. Enables screw terminal access and additional matrix sizes including: quad 4×28 (1W), dual 4×28 (2W), single 4×56 (2W), dual 4×56 (1W), and single 4×112 (1W).

For use with: 3732

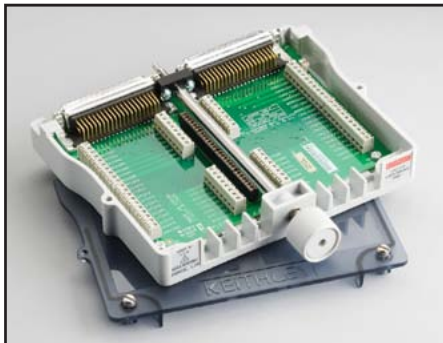

Model 3732-ST-R: Screw Terminal Block. Enables screw terminal access and additional matrix sizes including: dual 8×28 (1W), single 8×28 (2W), and single 16×28 (1W).

For use with: 3732



Model 3740-ST: Screw Terminal Block.

For use with: 3740



Model 3750-ST: Screw Terminal Block.

For use with: 3750



Model 3790-KIT50-R: 50-pin female D-sub connector kit that contains two female D-sub connectors and 100 solder cup contacts. Use for assembly of custom cable and harnesses compatible with Series 3700 plug-in cards.

For use with: 3721, 3730, 3731, 3740, 3750



Model 3791-CIT: Contact insertion and extraction tool for assembly and maintenance of Series 3700 D-sub Connector kits.

For use with: 3791-KIT78-R, 3791-KIT104-R



Model 3791-KIT78-R: 78-pin female D-sub connector kit that contains two female D-sub connectors and 156 solder-cup contacts. Use for assembly of custom cable and harnesses compatible with Series 3700 plug-in cards.

For use with: 3720, 3723, 3724



Model 3792-KIT104-R: 104-pin male D-sub connector kit that contains two male D-sub connectors with housings and 208 solder-cup contacts. Use for assembly of custom cable and harnesses compatible with Series 3700 plug-in cards.

For use with: 3722



Model 3792-KIT104-R/F: 104-pin female D-sub connector kit that contains two female D-sub connectors with housings and 208 solder-cup contacts. Use for assembly of custom cables, harnesses, and DUT interface compatible with Series 3700 plug-in cards.

For use with: 3722

Connectors, Adapters, and Tools



Model 4851: BNC shorting plug.
For use with instruments with BNC connectors



Model 6171: 3-slot male to 2-lug female triax adapter.
For use with: 2-lug triax connectors




Model 6172: 2-slot male to 3-lug female triax adapter. For use in adapting Models 7065 and 250INT inputs to 3-slot triax plugs.
For use with: 7065, 2500INT




Model 7001-PNL: Metal plate used to cover an empty card slot on the rear panel of a Model 7001.
For use with: 7001




Model 7011-KIT-R: 96-pin female DIN connector with solder eyelets and strain relief. This kit can be used for assembly of custom cables to connect with the connectors on the 7011-C, 7012-C, 7013-C, 7015-C, and 7018-C switch cards. Also connects with the 7011-MTR bulkhead mount male connector.
For use with: 7011-C, 7012-C, 7013-C, 7015-C, 7018-C

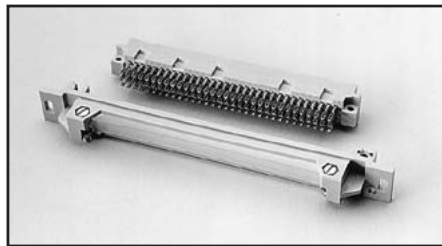


Model 7011-MTR: 96-pin male DIN connector with solder eyelets for bulkhead mount. Connects with the 7011-KIT-R and the 7011-MTC-2.
For use with: 7011-KIT-R, 7011-C, 7012-C, 7013-C, 7015-C, 7018-C

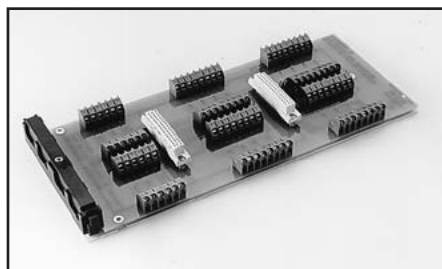


Model 7011-ST: Extra quick disconnect screw terminal board. One 7011-ST is included with each 7011-S.
For use with: 7011-S

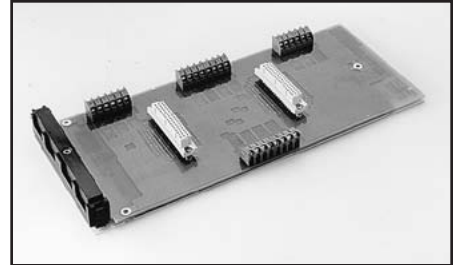

Model 7012-ST: Extra quick disconnect screw terminal board. One 7012-ST is included with each 7012-S.
For use with: 7012-S

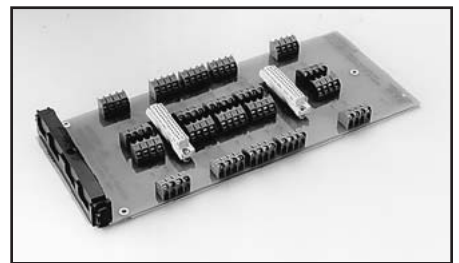


Model 7013-ST: Extra quick disconnect screw terminal board. One 7013-ST is included with each 7013-S.
For use with: 7013-S

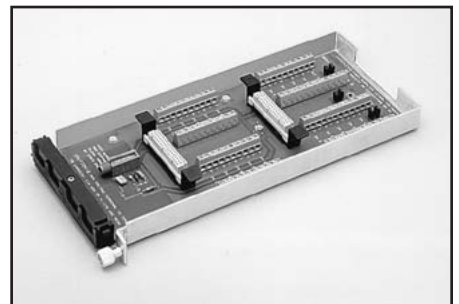


Model 7014-ST: Extra quick disconnect isothermal screw terminal board with cold junction sensor. One 7014-ST is included with each 7014.
For use with: 7014

Connectors, Adapters, and Tools

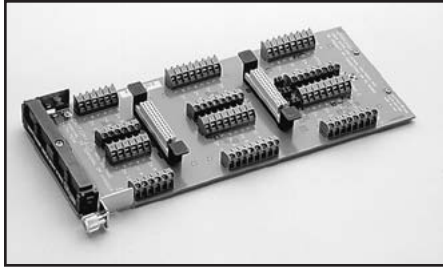

Model 7015-ST: Extra quick disconnect screw terminal board. One 7015-ST is included with each 7015-S.

For use with: 7015-S

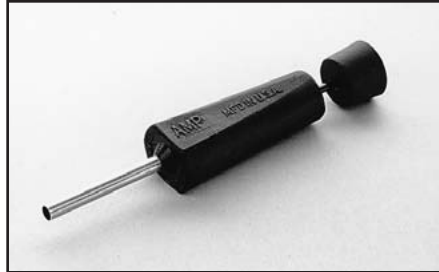


Model 7074-CIT: Contact extraction tool for removal of contacts from cables and connectors.

For use with: 7152-KIT, 7152-MTR



Model 7078-HCT: Contact crimping pliers for assembly of cables and connectors using 7078-MTR or 7078-KIT.

For use with: 7078-KIT

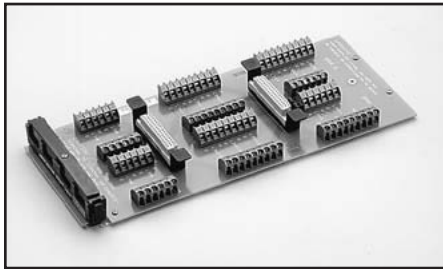


Model 7018-ST: Extra quick disconnect screw terminal board. One 7018-ST is included with each 7018-S.

For use with: 7018-S



Model 7074-HCT: Contact crimping pliers for assembly of cables and connectors.

For use with: 7152-KIT, 7152-MTR

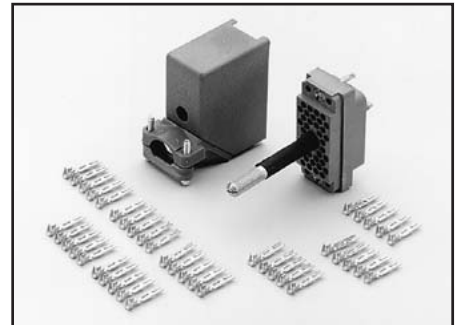

Model 7078-KIT: 38-pin male plug assembly with strain relief and 40 contacts for assembly of custom cable and harnesses compatible with Model 7071 8×12 Matrix Card, Model 7071-4 Dual 4×12 Matrix Card, and 7078-MTR Mass Terminated Receptacle. Requires 7078-HCT; recommend 7078-CIT.

For use with: 7071, 7071-4, 7074-D, 7078-MTR




Model 7072-TRT: Triax removal tool used to connect or disconnect triax style connectors when clearance is limited making it difficult to mate or unmate a connector with your fingers.

For use with: 707B, 708B



Model 7078-CIT: Contact insertion and extraction tool for assembly and maintenance of 7078-MTC cables and connectors.

For use with: 7078-KIT, 7078-MTR, 7152-KIT, 7152-MTR

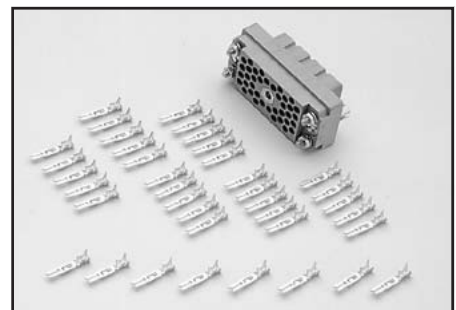

Model 7078-MTR: 38-pin female bulkhead mount receptacle with 40 contacts for custom interface and patch panels compatible with 7078-MTC and 7078-KIT. Requires 7078-HCT; recommend 7078-CIT.

For use with: 7078-KIT, 7078-MTC, 7071, 7071-4

Connectors, Adapters, and Tools



Model 7078-TRX-BNC: 3-slot male triax to BNC adapter for use with 7072 Semiconductor Matrix Card and 4801 cables.

For use with: 486, 487, 4210-CVU, 4687, 4801, 6514, 6517A, 6517B, 7072, 7072-HV



Model 7078-TRX-GND: 3-slot male triax to female BNC adapter (guard removed) for adapting non-guarded measurements to the Model 237 SMU, 7072 or 7072-HV Semiconductor Matrix Cards, or 8006 or 8008 Test Fixtures.

For use with: 237, Series 2600, Series 2600A, 4801, 6517A, 6517B, 7051, 7072, 7072-HV



Model 7078-TRX-TBC: 3-lug female triax bulkhead connector with cap for assembly of custom panels and interface connections.

For use with: 7078-TRX Cables



Model 7152-HCT: Contact crimping pliers for assembly of cables and connector using 7152-MTR or 7152-KIT.

For use with: 7152-KIT, 7152-MTR



Model 7152-KIT: 6-pin plug assembly with strain relief and contacts for assembly of custom cable and harnesses compatible with Model 7152 4x5 Low Current Matrix Card and 7152-MTR Mass Terminated Receptacle. Requires 7152-HCT recommend 7074-CIT and 7074-HCT.

For use with: 7152, 7152-MTR



Model 7152-MTR: 6-pin bulkhead mount receptacle with contacts for custom interface and patch panels compatible with 7152-MTC and 7152-KIT. Requires 7152 HCT; recommend 7074-CIT and 7074-HCT.

For use with: 7152, 7152-KIT, 7152-MTC-2, 7152-MTC-10



Model 7703-306A: DB50 male connector kit (solder cup) with shell.

For use with: 7701, 7703, 7705, 7709



Model 7709-308A: DB25 male connector kit (solder cup) with shell.

For use with: 7701, 7707, 7709



Model 7712-SMA-N: Female SMA to male N-type adapter.

For use with: 7711, 7712

Connectors, Adapters, and Tools



Model 7755 50Ω Feed-Through Terminator: BNC-to-BNC adapter for terminating RG58 cable in its characteristic impedance. VSWR <1.1, DC–250MHz.

For use with: RG58 Cable, 776, 3390



Model 7790: 50 pin male, 50 pin female, 25 pin male IDC D-Shell Connector Kit (one each).

For use with: 7701, 7703, 7705, 7707, or 7709 Integra modules



Model 8680 RTD Probe Adapter: Provides a means of connecting RTD probes terminated in either a 4-wire instrumentation connector or bare wires to safety input jacks on a 0.5 inch spacing. Use with Models 8681, 8693, 8695, or 8696.

For use with: 2001, 2002, 2010



Model 7788: 50-pin D subminiature connector kit. To mate with 50-pin connector on Model 7703 and 7705.

For use with: 7703, 7705, 77XX modules with D sub connectors



Model 8610 Low Thermal Shorting Plug: For calibration lab use, this plug provides a very low thermal offset short at front or rear inputs.

For use with: 2000, 2001, 2002, 2010



BG-18: Dual banana to BNC coaxial adapter for adapting connection on instrument with dual banana jack.

For use with: 230, Series 2000, Series 2400, 2700, 2750



Model 7789: 50-pin/25-pin (both male) D-Shell Kit (one of each) for 7701 or 7709 Integra modules (mating connectors are supplied with these modules when purchased).

For use with: 7701, 7709



Model 8620 Four-Wire DMM Shorting Plug: Provides a low resistance 4-wire short to both observe and cancel DMM offset resistances and voltages to improve measurement accuracies.

For use with: 2000, 2001, 2002, 2010, 2015, 2016, Series 2400, Series 2700, Series 3700



CAP-18: Protective shield/cap for BNC connectors.

For use with: BNC connectors

Connectors, Adapters, and Tools



CAP-31: Protective shield/cap for 3-lug triax connectors.

For use with: 3-lug triax connectors



CS-630: 3-lug female triax bulkhead connector for soldered connection. Mates with CS-631.

For use with: Fixtures, 6487, 6517A, 6517B



CS-719: 3-lug triax jack receptacle.

For use with: 4200-SCS



CS-400: DB25 male solder cup.

For use with: C126-1 cable, 213



CS-631: 3-slot male triax cable mount connector for use with SC-22 cable. Mates to Models 237, 486, 487, 7072, and 8006.

For use with: 4200-SCS, SC-22 cable



CS-846: Eight position connector with screw terminals for connection to test leads.

For use with: 230X, 2510, 2510-AT



CS-458: Interlock connector kit to mate with 6517-ILC-3.

For use with: 6517-ILC-3



CS-701: BNC tee adapter (female, male, female).

For use with: 4200-SCS



CS-970: High voltage bulkhead connector.

For use with: 248, 248-SHV cable



CS-565: Female BNC to female BNC adapter with 50Ω nominal impedance.

For use with: 4200-SCS, BNC interconnect

Connectors, Adapters, and Tools



CS-1247: SMA female to BNC male adapter
For use with: 4200-SCS



CS-1249: SMA female to SMB plug adapter
For use with: 4200-SCS



CS-1251: BNC female to SMB plug adapter
For use with: 4200-SCS



CS-1252: SMA male to BNC female adapter
For use with: 4200-SCS



CS-1281: SMA female to SMA female adapter
For use with: 4200-SCS



CS-1305: Interlock connector to mate with Model 6517B.
For use with: 6517B




CS-1382: Female MMBX jack to male SMA plug adapter with 50Ω impedance and 6GHz maximum frequency
For use with: 4200-SCS



CS-1390: Male LEMO triax to female SMA adapter
For use with: 4200-SCS



CS-1391: SMA tee adapter (female-male-female)
For use with: 4200-SCS

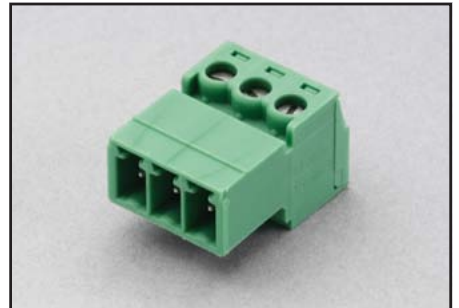

CS-1423-3: Miniature mating connector used as a ground connector for the Models 2635, 2635A, 2636, and 2636A.
For use with: 2635, 2636, 2635A, 2636A



CS-1479: SMA male to BNC male adapter
For use with: 4200-SCS



TL-24: SMA torque wrench
For use with: 4200-SCS, System 46, System 46T

Distributed by:
 www.SignalTestInc.com
 1529 Santiago Ridge Way
 San Diego, CA 92154 USA.
 Sales@SignalTestInc.com

SIGNAL TEST
 New & Used Test Equipment