

Constant Voltage Mode

CVH Range	0.000 ~ 600.0	V
CVM Range	0.000 ~ 300.0	V
CVL Range	0.000 ~ 60.00	V
Transient Time Range		
Fast Band(Default,Osc1)	0.500 ~ 51.19	ms
Slow Band(Osc2,Osc3)	0.500 ~ 511.9	ms
Temperature Coefficient	100 ppm / °C of Rated Voltage	
Program		
CV Resolution*2	1/16000 of Rated Voltage	
CVH Accuracy*2	0.05% ± 0.600	V
CVM Accuracy*2	0.05% ± 0.600	V
CVL Accuracy*2	0.05% ± 0.600	V
Display		
CVH Resolution	1/16000 of Rated Voltage	
CVH Accuracy	0.05% ± 0.600	V
CVM Accuracy	0.05% ± 0.600	V
CCL Accuracy	0.05% ± 0.600	V

Constant Current Mode

CCH Range	0.000 ~ 600.0	A
CCM Range	0.000 ~ 300.0	A
CCL Range	0.000 ~ 60.00	A
Transient Time Range		
Fast Band(Default,Osc1)	0.050 ~ 51.19	ms
Slow Band(Osc2,Osc3)	0.500 ~ 511.9	ms
Minimum Voltage(I _{Max})	4.800	V
Temperature Coefficient	100 ppm / °C of Rated Current	
Program		
CC Resolution*2	1/16000 of Rated Current	
CCH Accuracy*2	0.05% ± 0.600	A
CCM Accuracy*2	0.05% ± 0.600	A
CCL Accuracy*2	0.05% ± 0.600	A
Display		
CC Resolution	1/16000 of Rated Current	
CCH Accuracy	0.05% ± 0.600	A
CCM Accuracy	0.05% ± 0.600	A
CCL Accuracy	0.05% ± 0.600	A

Programmable Protection

Power(OPP)		
Range	23.63 ~ 18,900	W
Resolution	2.363	W
Accuracy	0.50% ± 47.25	W
Voltage(OVP)		
Range	0.394 ~ 630.0	V
Resolution	0.039	V
Accuracy	0.20% ± 0.788	V
Current(OC)		
Range	0.394 ~ 630.0	A
Resolution	0.039	A
Accuracy	0.20% ± 0.788	A
Under Voltage Lockout(UVL)		
Mode	Input On / Continuous	
Range	0.450 ~ 600.0	V
Resolution	0.150	V
Accuracy	2.50% ± 0.750	V
Anti-Oscillation	Default / Osc1 / Osc2 / Osc3 / Disable	

Protection

Over Power Protection(OP)	18,900 ± 360.0	W
Over Voltage Protection(OV)	630.0 ± 12.00	V
Over Current Protection(OC)	660.0 ± 6.286	A
Over Temperature Protection(OTP)	50.00 ± 5.000	°C
Reverse Maximum Current(RCP)	660.0	A
Short Maximum Current	612.0	A
Remote Inhibit(RI)	Short	
Fault Indicator	SPDT Relay (30Vdc/0.5A or 125Vac/0.25A)	

Dielectric Strength

Primary Circuit To Chassis	1500 Vac for 1 min
Primary Circuit To Load Terminal	1500 Vac for 1 min
Load Terminal To Chassis	1500 Vdc for 1 min

Constant Power Mode

CPH Range	0.000 ~ 18,000	W
CPM Range	0.000 ~ 9,000	W
	@ lin ≤ 300.0	A
CPL Range	0.000 ~ 1,800	W
	@ lin ≤ 60.00	A
Transient Time Range		
Same As CC Mode		
Temperature Coefficient	300 ppm / °C of Rated Power	
Program		
CP Resolution*2	1/16000 of Rated Power	
CPH Accuracy*2	1.00% ± 90.00	W
	@lin > 30.00	A
	& Vin > 60.00	V
CPM Accuracy*2	1.00% ± 90.00	W
	@lin > 6.000	A
	& Vin > 60.00	V
CPL Accuracy*2	1.00% ± 90.00	W
	@lin > 0.600	A
	& Vin > 120.0	V

Constant Resistance Mode

CRH Range	10.00 ~ 500.0	Ω
	@ lin ≤ 60.00	A
CRM Range	1.000 ~ 250.0	Ω
CRL Range	0.0080 ~ 1.000	Ω
Transient Time Range		
CRM / CRH	Same As CC Mode	
CRL	Same As CV Mode	
Temperature Coefficient		
CRM / H	300 ppm / °C of Minimum Resistance	
CRL	300 ppm / °C of Maximum Resistance	
Program		
CR Resolution*2	1/16000 Of Rated Value	
CRH Accuracy*2	1.00% ± 0.500	mS
	@lin > 0.600	A
	& Vin > 120.0	V
CRM Accuracy*2	1.00% ± 2.000	mS
	@lin > 6.000	A
	& Vin > 60.00	V
CRL Accuracy*2	1.00% ± 1.000	mS
	@lin > 60.00	A
	& Vin > 0.600	V

External Programming Mode

Analog Program	0~10 Volts Input yields
	0~selected full scaled loading in all modes
Accuracy	Same As Internal ± 0.1% Rating
Input Impedance	400 kΩ ± 1%
BandWidth(-3dB)	Limited By Internal Transient Time
Monitor output Signal	0~10 Volts output for 0~full scaled Value
VMON Accuracy	0.10% ± 0.600 V
IMON Accuracy	0.10% ± 0.600 A
Transient Mode	
Frequency Range	0.100 ~ 10,000 Hz
Accuracy	0.1%
Duty Range	1.000 ~ 100.0 %
Accuracy	0.1%
Transient Time Accuracy	10.0% ± 50% of Minimum Time
Remote Interface	GPIOB / RS-232 / ETHERNET / USB


General

Fluid		
Valve	Normal Close(Power On Thermal Control)	
Flow Rate(Pmax)	≥ 4.5 GPM @ 15°C Fluid In	
Derating for higher temperatures	(-)3% Rated Power / °C	
Pressure	<80 PSI	
Pipe Size	Dual 1/2"(3/4"-Manifold) NPT Female	
Decondensation	Valve Thermal Control	
AC Input	95~240 Vac 48~62 Hz	
Power Consumption	160 VA	
Operating Temperature	5°C ~ 40°C	
Dimension	27.5"(L)x17"(W)x7.0"(H)	
Weight	140 lbs	63.5 kg
Approx.Shipping Weight	160 lbs	72.6 kg

*1 All Mode Specification measure by slow band and 25°C room temperature unless otherwise specified
 *2 Transient Mode Specification must be x2
 AMREL reserves the right to change limits, test conditions, and dimensions without notice



PLW18K-600-600 (600V,600A,18KW) OPERATIONAL CURVE

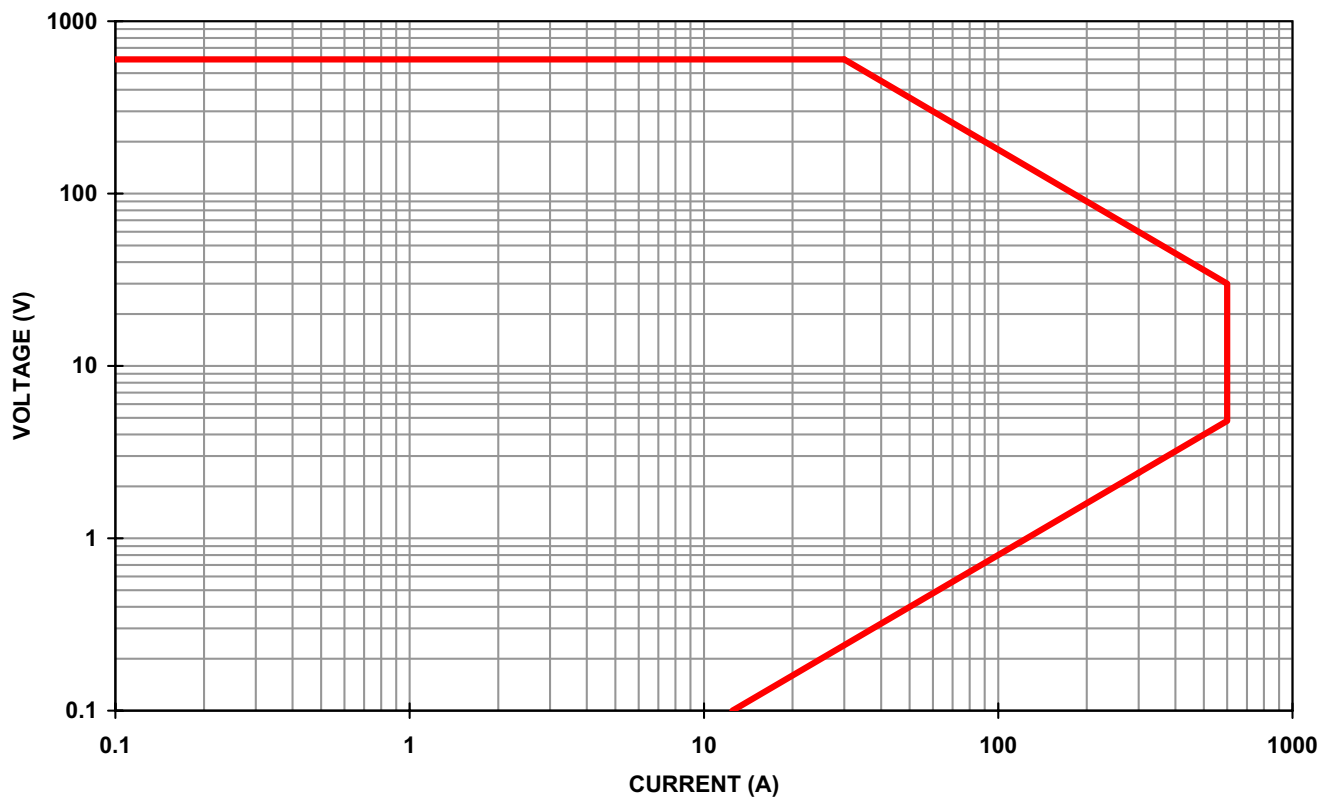

Distributed By:
Signal Test, Inc
1529 Santiago Ridge Way
San Diego, CA 92154
Tel. 1-619-575-1577 USA
www.SignalTestInc.com
Sales@SignalTestInc.com



www.amrel.com Intl. 626 443-6818 U.S./Canada 800 654-9838