


Active Probes

TAP2500 • TAP3500 Data Sheet

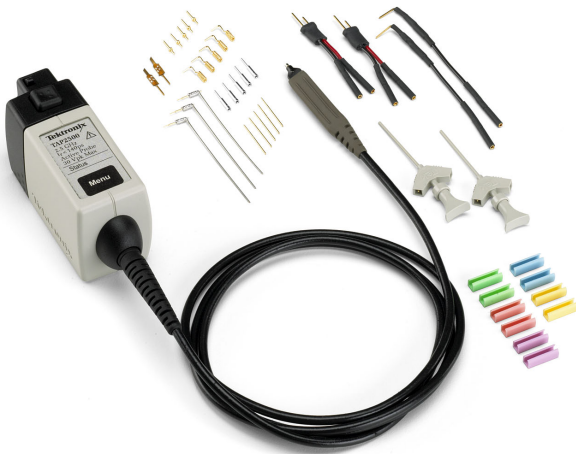

Features & Benefits

- Outstanding Electrical Performance
 - High Probe Bandwidth
 - Fast Probe Rise Time
 - Excellent Signal Fidelity
 - ≤ 0.8 pF Input Capacitance
 - 40 k Ω Input Resistance
 - -4 V to +4 V Input Dynamic Range
 - -10 V to +10 VDC Input Offset Range
 - ± 30 V (DC + peak AC) Max Input Voltage (Nondestruct)
- Versatile Mechanical Performance
 - Small Compact Probe Head for Probing Small Geometry Circuit Elements
 - DUT Attachment Accessories Enable Connection to SMDs as Small as 0.5 mm Pitch
 - Robust Design for Reliability

- Easy-to-Use
 - Connects Directly to DPO7000 and DPO4000 Series Oscilloscopes Using the New TekVPI™ Probe Interface
 - Provides Automatic Units Scaling and Readout on the Oscilloscopes Display
 - Easy Access to Oscilloscope Probe Menu Display for Probe Status/Diagnostic Information and to Control Probe DC Offset

Applications

- Verification, Debug, and Characterization of High-speed Designs
- Signal Integrity, Jitter, and Timing Analysis
- Manufacturing Engineering and Test
- Signals with Voltage Swings up to 8 V_{pk-pk}

Selecting the right probe for your application is key to attaining the best signal fidelity in your measurements. Active probes provide truer signal reproduction and fidelity for high-frequency measurements. With our ultra-low input capacitance and unique interface, the TAP2500 and TAP3500 Single-ended Active FET probes provide excellent high-speed electrical and mechanical performance required for today's digital system designs.

Specifically designed for use and direct connection to the TekVPI™ probe interface used on the DPO7000 and DPO4000 Series oscilloscopes, the TAP2500 and TAP3500 Active FET probes achieve high-speed signal acquisition and measurement fidelity by solving three traditional problems:

- Lower DUT loading effects with ≤ 0.8 pF input capacitance and 40 k Ω input resistance
- Versatile DUT connectivity for attaching to small SMDs
- Preserves oscilloscope bandwidth at the probe tip for DPO7000 and DPO4000 Series Oscilloscope models up to 3.5 GHz

Characteristics

Bandwidth (Probe only) –

≥2.5 GHz (TAP2500).

≥3.5 GHz (TAP3500).

Attenuation (Probe only) – 10:1.

Rise Time (Probe only) –

<140 ps (TAP2500).

<130 ps (TAP3500).

Input Capacitance – ≤0.8 pF.

Input Resistance – 40 kΩ.

Input Dynamic Range – -4 V to +4 V.

Input Offset Range – -10 V to +10 V.

Max Input Voltage (Nondestruct) – ±30 V (DC + peak AC).

Propagation Delay – 5.3 ns.

Physical Characteristics

Dimensions	mm	in.
Width	7.6	0.30
Height	7.6	0.30
Depth	57.2	2.25
Cable Length	1300	51
Weight	kg	lb.
Net	0.091	0.2 (probe only, using ME lab scale)

Power Requirements

TAP2500 and TAP3500 are powered directly by the DPO7000 and DPO4000 Series Oscilloscopes using TekVPI™ probe interface.

Recommended Oscilloscopes

DPO7000 and DPO4000 Series Oscilloscopes with TekVPI™ probe interface.

Environmental

Temperature –

Operating: 0 °C to +50 °C.

Nonoperating: -40 °C to +71 °C.

Humidity –

Operating: 5% to 95% Relative Humidity (RH) at up to +30 °C; 5% to 85% RH above +30 °C up to +50 °C; noncondensing.

Nonoperating: 5% to 95% Relative Humidity (RH) at up to +30 °C; 5% to 85% RH above +30 °C up to +75 °C; noncondensing.

Altitude –

Operating: Up to 4,400 m (15,000 ft.).

Nonoperating: Up to 12,192 m (40,000 ft.).

Regulatory

Emissions Compliance – EN 55011, Class A.

Compliance Labeling –

C-Tick (Australia / New Zealand)

CE (European Union)

WEEE (European Union)

Ordering Information

TAP2500

2.5 GHz Active Probe.

TAP3500

3.5 GHz Active Probe.

Description	Qty with TAP2500 and TAP3500	Reorder Part Number (Qty)
Y-lead Adapter (2 each) and 3 in. ground lead (3 each)	1 set	196-3456-xx (1 set)
SMT KlipChip™ Adapter	2 each	206-0364-xx (1 ea)
Customizable Ground Lead (set of 5)	1 set	196-3482-xx (1 set)
Color Band Kit (5 colored pairs)	1 set	016-1315-xx (1 set)
Pogo Pin Ground (set of 10)	1 set	016-1772-10 (1 set)
Square Pin Socket (set of 10)	1 set	016-1773-10 (1 set)
Push-in Probe Tip (set of 10)	1 set	131-5638-11 (1 set)
Right-angle Adapter (set of 10)	1 set	016-1774-xx (1 set)
SureToe™ Adapter (set of 4)	1 set	131-6254-xx (1 set)
Antistatic Wrist Strap	1 each	006-3415-xx (1 ea)
Nylon Carrying Case	1 each	016-1952-xx (1 ea)
Plastic Accessory Case	1 each	006-7164-xx (1 ea)
Instruction Manual	1 each	071-xxxx-xx (1 ea)

Optional Accessories

Description	Package Quantity	Ordering Part Number
50 mil pitch (.050 inch) IC Adapter	12	SF501
25 mil pitch (.025 inch) IC Adapter	12	SF502
0.5 mm IC Adapter	12	SF503
IC Micro Grabber	2	013-0309-xx
SMA-to-Probe Tip Adapter	1	015-0678-xx
TekVPI Calibration Fixture (for PV)	1	067-1701-xx

Manual Language Options

Opt. L5 – Japanese instruction manual.

Opt. L7 – Simplified Chinese instruction manual.

Service Options

Opt. C3 – Calibration Service 3 years.

Opt. C5 – Calibration Service 5 years.

Opt. D1 – Calibration Data Report.

Opt. D3 – Calibration Data Report 3 Years (with Opt. C3).

Opt. D5 – Calibration Data Report 5 Years (with Opt. C5).

Opt. R3 – Repair Service 3 Years.

Opt. R5 – Repair Service 5 Years.

Opt. CA1 – Single calibration event, or coverage for the designated calibration interval, whichever comes first.



Product(s) are manufactured in ISO registered facilities.

Contact Tektronix:

ASEAN / Australasia (65) 6356 3900
Austria +41 52 675 3777
Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Belgium 07 81 60166
Brazil +55 (11) 40669400
Canada 1 (800) 661-5625
Central East Europe, Ukraine, and the Baltics +41 52 675 3777
Central Europe & Greece +41 52 675 3777
Denmark +45 80 88 1401
Finland +41 52 675 3777
France +33 (0) 1 69 86 81 81
Germany +49 (221) 94 77 400
Hong Kong (852) 2585-6688
India (91) 80-42922600
Italy +39 (02) 25086 1
Japan 81 (3) 6714-3010
Luxembourg +44 (0) 1344 392400
Mexico, Central/South America & Caribbean 52 (55) 54247900
Middle East, Asia, and North Africa +41 52 675 3777
The Netherlands 090 02 021797
Norway 800 16098
People's Republic of China 86 (10) 6235 1230
Poland +41 52 675 3777
Portugal 80 08 12370
Republic of Korea 82 (2) 6917-5000
Russia & CIS +7 (495) 7484900
South Africa +27 11 206 8360
Spain (+34) 901 988 054
Sweden 020 08 80371
Switzerland +41 52 675 3777
Taiwan 886 (2) 2722-9622
United Kingdom & Ireland +44 (0) 1344 392400
USA 1 (800) 426-2200

For other areas contact Tektronix, Inc at: 1 (503) 627-7111

Updated 30 October 2008

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tektronix.com



Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

09 Jun 2009

51W-19044-4

www.tektronix.com



Distributed by:
www.SignalTestInc.com
1529 Santiago Ridge Way
San Diego, CA 92154 USA.
Sales@SignalTestInc.com

