

Constant Voltage Mode

CVH Range	0.000 ~ 400.0	V
CVM Range	0.000 ~ 200.0	V
CVL Range	0.000 ~ 40.00	V
Transient Time Range		
Fast Band(Default,Osc1)	0.500 ~ 51.19	ms
Slow Band(Osc2,Osc3)	0.500 ~ 511.9	ms
Temperature Coefficient	100 ppm / °C of Rated Voltage	
Program		
CV Resolution*2	1/16000 of Rated Voltage	
CVH Accuracy*2	0.05% ± 0.400 V	
CVM Accuracy*2	0.05% ± 0.400 V	
CVL Accuracy*2	0.05% ± 0.400 V	
Display		
CVH Resolution	1/16000 of Rated Voltage	
CVH Accuracy	0.05% ± 0.400 V	
CVM Accuracy	0.05% ± 0.400 V	
CCL Accuracy	0.05% ± 0.400 V	

Constant Current Mode

CCH Range	0.000 ~ 120.0	A
CCM Range	0.000 ~ 60.00	A
CCL Range	0.000 ~ 12.00	A
Transient Time Range		
Fast Band(Default,Osc1)	0.050 ~ 51.19	ms
Slow Band(Osc2,Osc3)	0.500 ~ 511.9	ms
Minimum Voltage(I _{Max})	3.600 V	
Temperature Coefficient	100 ppm / °C of Rated Current	
Program		
CC Resolution*2	1/16000 of Rated Current	
CCH Accuracy*2	0.05% ± 0.120 A	
CCM Accuracy*2	0.05% ± 0.120 A	
CCL Accuracy*2	0.05% ± 0.120 A	
Display		
CC Resolution	1/16000 of Rated Current	
CCH Accuracy	0.05% ± 0.120 A	
CCM Accuracy	0.05% ± 0.120 A	
CCL Accuracy	0.05% ± 0.120 A	

Programmable Protection

Power(OPP)		
Range	1.100 ~ 880.0	W
Resolution	0.110 W	
Accuracy	0.50% ± 2.200 W	
Voltage(OVP)		
Range	0.263 ~ 420.0	V
Resolution	0.026 V	
Accuracy	0.20% ± 0.525 V	
Current(OC)		
Range	0.079 ~ 126.0	A
Resolution	0.008 A	
Accuracy	0.20% ± 0.158 A	
Under Voltage Lockout(UVL)		
Mode	Input On / Continuous	
Range	0.300 ~ 400.0	V
Resolution	0.100 V	
Accuracy	2.50% ± 0.500 V	
Anti-Oscillation	Default / Osc1 / Osc2 / Osc3 / Disable	

Protection

Over Power Protection(OP)	880.0 ± 16.76	W
Over Voltage Protection(OV)	420.0 ± 8.000	V
Over Current Protection(OC)	132.0 ± 1.257	A
Over Temperature Protection(OTP)	90.00 ± 5.000	°C
Reverse Maximum Current(RCP)	132.0	A
Short Maximum Current	122.4	A
Remote Inhibit(RI)	Short	
Fault Indicator	SPDT Relay (30Vdc/0.5A or 125Vac/0.25A)	

Dielectric Strength

Primary Circuit To Chassis	1500 Vac for 1 min
Primary Circuit To Load Terminal	1500 Vac for 1 min
Load Terminal To Chassis	1500 Vdc for 1 min

Constant Power Mode

CPH Range	0.000 ~ 800.0	W
CPM Range	0.000 ~ 400.0	W
@ lin	≤ 60.00	A
CPL Range	0.000 ~ 80.00	W
@ lin	≤ 12.00	A
Transient Time Range		
Same As CC Mode		
Temperature Coefficient	300 ppm / °C of Rated Power	
Program		
CP Resolution*2	1/16000 of Rated Power	
CPH Accuracy*2	1.00% ± 4.000 W	
@lin	> 6.000 A	
& Vin	> 40.00 V	
CPM Accuracy*2	1.00% ± 4.000 W	
@lin	> 1.200 A	
& Vin	> 40.00 V	
CPL Accuracy*2	1.00% ± 4.000 W	
@lin	> 0.120 A	
& Vin	> 80.00 V	

Constant Resistance Mode

CRH Range	33.33 ~ 1,667	Ω
@ lin	≤ 12.00	A
CRM Range	3.333 ~ 833.3	Ω
CRL Range	0.0300 ~ 3.333	Ω
Transient Time Range		
CRM / CRH	Same As CC Mode	
CRL	Same As CV Mode	
Temperature Coefficient		
CRM / H	300 ppm / °C of Minimum Resistance	
CRL	300 ppm / °C of Maximum Resistance	
Program		
CR Resolution*2	1/16000 Of Rated Value	
CRH Accuracy*2	1.00% ± 0.150 mS	
@lin	> 0.120 A	
& Vin	> 80.00 V	
CRM Accuracy*2	1.00% ± 0.600 mS	
@lin	> 1.200 A	
& Vin	> 40.00 V	
CRL Accuracy*2	1.00% ± 3.333 mΩ	
@lin	> 12.00 A	
& Vin	> 0.400 V	

External Programming Mode

Analog Program	0~10 Volts Input yields 0~selected full scaled loading in all modes
Accuracy	Same As Internal ± 0.1% Rating
Input Impedance	400 kΩ ± 1%
BandWidth(-3dB)	Limited By Internal Transient Time
Monitor output Signal	0~10 Volts output for 0~full scaled Value
VMON Accuracy	0.10% ± 0.400 V
IMON Accuracy	0.10% ± 0.120 A
Transient Mode	
Frequency Range	0.100 ~ 10,000 Hz
Accuracy	0.1%
Duty Range	1.000 ~ 100.0 %
Accuracy	0.1%
Transient Time Accuracy	10.0% ± 50% of Minimum Time
Remote Interface	GPIOB / RS-232 / ETHERNET / USB

General


Derating for higher temperatures	(-).167% Rated Power / °C
AC Input	95~240 Vac 48~62 Hz
Power Consumption	100 VA
Operating Temperature	5 °C ~ 40 °C
Dimension	19.5"(L)x17"(W)x3.5"(H)
Weight	28 lbs 12.7 kg
Approx.Shipping Weight	54 lbs 24.5 kg

Ver 4.1 Date: 11/01/07

*1 All Mode Specification measure by slow band and 25°C room temperature unless otherwise specified
*2 Transient Mode Specification must be x2
AMREL reserves the right to change limits, test conditions, and dimensions without notice



PLA800-400-120 (400V,120A,800W) OPERATIONAL CURVE

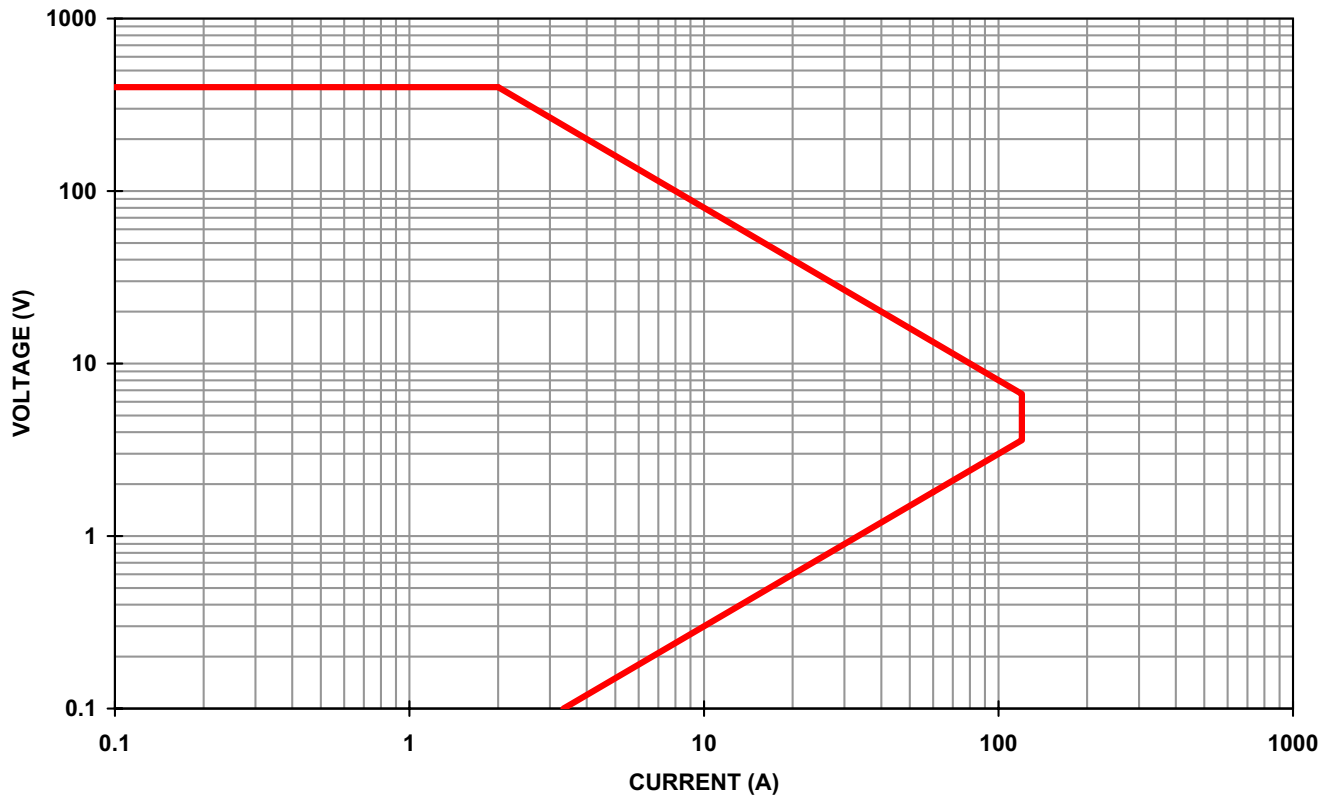

Distributed By:
Signal Test, Inc
1529 Santiago Ridge Way
San Diego, CA 92154
Tel. 1-619-575-1577 USA
www.SignalTestInc.com
Sales@SignalTestInc.com



www.amrel.com Intl. 626 443-6818 U.S./Canada 800 654-9838