

### Constant Voltage Mode

CVH Range	0.000 ~ 600.0	V
CVM Range	0.000 ~ 300.0	V
CVL Range	0.000 ~ 60.00	V
Transient Time Range		
Fast Band(Default,Osc1)	0.500 ~ 51.19	ms
Slow Band(Osc2,Osc3)	0.500 ~ 511.9	ms
Temperature Coefficient	100 ppm / °C of Rated Voltage	
<b>Program</b>		
CV Resolution*2	1/16000 of Rated Voltage	
CVH Accuracy*2	0.05% ± 0.600	V
CVM Accuracy*2	0.05% ± 0.600	V
CVL Accuracy*2	0.05% ± 0.600	V
<b>Display</b>		
CVH Resolution	1/16000 of Rated Voltage	
CVH Accuracy	0.05% ± 0.600	V
CVM Accuracy	0.05% ± 0.600	V
CCL Accuracy	0.05% ± 0.600	V

### Constant Current Mode

CCH Range	0.000 ~ 50.00	A
CCM Range	0.000 ~ 25.00	A
CCL Range	0.000 ~ 5.000	A
Transient Time Range		
Fast Band(Default,Osc1)	0.050 ~ 51.19	ms
Slow Band(Osc2,Osc3)	0.500 ~ 511.9	ms
Minimum Voltage(I <sub>Max</sub> )	5.500	V
Temperature Coefficient	100 ppm / °C of Rated Current	
<b>Program</b>		
CC Resolution*2	1/16000 of Rated Current	
CCH Accuracy*2	0.05% ± 0.050	A
CCM Accuracy*2	0.05% ± 0.050	A
CCL Accuracy*2	0.05% ± 0.050	A
<b>Display</b>		
CC Resolution	1/16000 of Rated Current	
CCH Accuracy	0.05% ± 0.050	A
CCM Accuracy	0.05% ± 0.050	A
CCL Accuracy	0.05% ± 0.050	A

### Programmable Protection

Power(OPP)		
Range	1.100 ~ 880.0	W
Resolution	0.110	W
Accuracy	0.50% ± 2.200	W
Voltage(OVP)		
Range	0.394 ~ 630.0	V
Resolution	0.039	V
Accuracy	0.20% ± 0.788	V
Current(OC)		
Range	0.033 ~ 52.50	A
Resolution	0.003	A
Accuracy	0.20% ± 0.066	A
Under Voltage Lockout(UVL)		
Mode	Input On / Continuous	
Range	0.450 ~ 600.0	V
Resolution	0.150	V
Accuracy	2.50% ± 0.750	V
Anti-Oscillation	Default / Osc1 / Osc2 / Osc3 / Disable	

### Protection

Over Power Protection(OP)	880.0 ± 16.76	W
Over Voltage Protection(OV)	630.0 ± 12.00	V
Over Current Protection(OC)	55.00 ± 0.524	A
Over Temperature Protection(OTP)	90.00 ± 5.000	°C
Reverse Maximum Current(RCP)	55.00	A
Short Maximum Current	51.00	A
Remote Inhibit(RI)	Short	
Fault Indicator	SPDT Relay (30Vdc/0.5A or 125Vac/0.25A)	

### Dielectric Strength

Primary Circuit To Chassis	1500 Vac for 1 min
Primary Circuit To Load Terminal	1500 Vac for 1 min
Load Terminal To Chassis	1500 Vdc for 1 min

### Constant Power Mode

CPH Range	0.000 ~ 800.0	W
CPM Range	0.000 ~ 400.0	W
@ lin	≤ 25.00	A
CPL Range	0.000 ~ 80.00	W
@ lin	≤ 5.000	A
Transient Time Range		
Same As CC Mode		
Temperature Coefficient	300 ppm / °C of Rated Power	
<b>Program</b>		
CP Resolution*2	1/16000 of Rated Power	
CPH Accuracy*2	1.00% ± 4.000	W
@lin	> 2.500	A
& Vin	> 60.00	V
CPM Accuracy*2	1.00% ± 4.000	W
@lin	> 0.500	A
& Vin	> 60.00	V
CPL Accuracy*2	1.00% ± 4.000	W
@lin	> 0.050	A
& Vin	> 120.0	V

### Constant Resistance Mode

CRH Range	120.0 ~ 6,000	Ω
@ lin	≤ 5.000	A
CRM Range	12.00 ~ 3,000	Ω
CRL Range	0.1100 ~ 12.00	Ω
Transient Time Range		
CRM / CRH	Same As CC Mode	
CRL	Same As CV Mode	
Temperature Coefficient		
CRM / H	300 ppm / °C of Minimum Resistance	
CRL	300 ppm / °C of Maximum Resistance	
<b>Program</b>		
CR Resolution*2	1/16000 Of Rated Value	
CRH Accuracy*2	1.00% ± 0.042	mS
@lin	> 0.050	A
& Vin	> 120.0	V
CRM Accuracy*2	1.00% ± 0.167	mS
@lin	> 0.500	A
& Vin	> 60.00	V
CRL Accuracy*2	1.00% ± 12.00	mΩ
@lin	> 5.000	A
& Vin	> 0.600	V

### External Programming Mode


Analog Program	0~10 Volts Input yields 0~selected full scaled loading in all modes
Accuracy	Same As Internal ± 0.1% Rating
Input Impedance	400 kΩ ± 1%
BandWidth(-3dB)	Limited By Internal Transient Time
Monitor output Signal	0~10 Volts output for 0~full scaled Value
VMON Accuracy	0.10% ± 0.600 V
IMON Accuracy	0.10% ± 0.050 A
Transient Mode	
Frequency Range	0.100 ~ 10,000 Hz
Accuracy	0.1%
Duty Range	1.000 ~ 100.0 %
Accuracy	0.1%
Transient Time Accuracy	10.0% ± 50% of Minimum Time
Remote Interface	GPIOB / RS-232 / ETHERNET / USB

### General

Derating for higher temperatures	(-).167% Rated Power / °C
AC Input	95~240 Vac 48~62 Hz
Power Consumption	100 VA
Operating Temperature	5 °C ~ 40 °C
Dimension	19.5"(L)x17"(W)x3.5"(H)
Weight	28 lbs      12.7 kg
Approx.Shipping Weight	54 lbs      24.5 kg



PLA800-600-50 (600V,50A,800W) OPERATIONAL CURVE

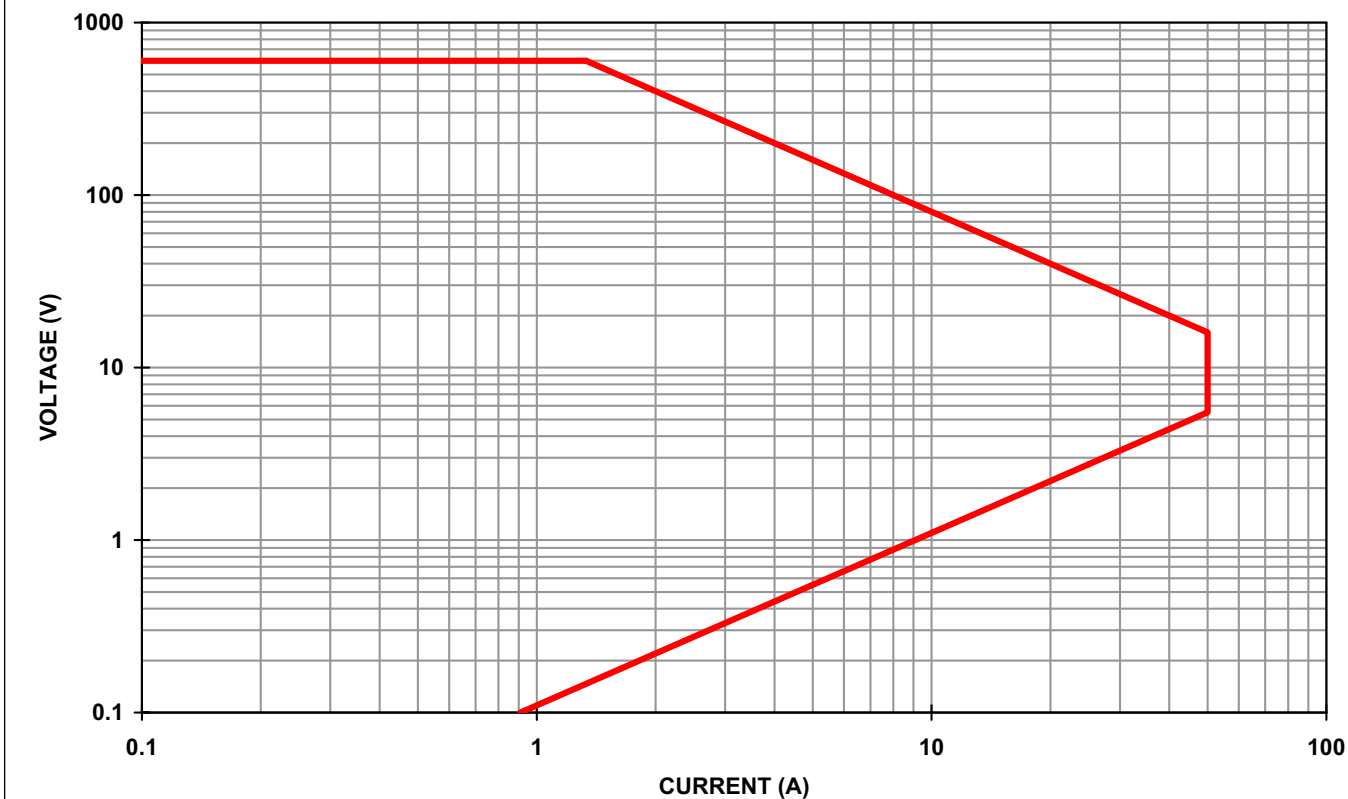

Distributed By:  
Signal Test, Inc  
1529 Santiago Ridge Way  
San Diego, CA 92154  
Tel. 1-619-575-1577 USA  
www.SignalTestInc.com  
Sales@SignalTestInc.com



www.amrel.com Intl. 626 443-6818 U.S./Canada 800 654-9838